

## PRODUCT DESCRIPTION



SML-301N



SML-302N



SML-302N-U/D




SML-303N

## QUICK MOUNT GUIDE

Unlike other fixtures which require more than two people to install, our Quick Mount Bracket helps you to save time and money. With its light, small and user friendly, you can install this fixture easily with only one person in a half of the time. Additionally, you can check the leveling by using the integrated level bubble on the mounting bracket. In this competitive industry, we understand the importance of saving you labor cost and time.



A  
Uninstall the mounting bracket from fixture base plate by unscrewing the 2 hex socket studs.




Level Bubble



B  
Remove the mounting bracket.



Level Bubble




C  
Level the bracket to intend altitude, install the bracket on the wall



D  
Lift the fixture up and tilt slightly toward the wall mounted bracket as figure D shown, hook the fixture base plate with the mounting bracket.



E  
Screw tight the bracket and fixture

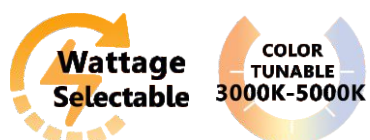

**UPDATED  
SELECTABLES**

**LED SURFACE MOUNT LIGHT**  
**SML-301N**  
**SML-302N**  
**SML-303N**



Meets DLC 5.1  
Requirements

PRODUCT DESCRIPTION

This full cut-off wall pack is elegant as it is functional. With high performance LEDS and long lasting driver, this fixture provides effective lighting all around.It can be used around factories, restaurants, shopping centers,etc.


FEATURES

- LISTING
  - UL and cUL listed for wet locations
- HOUSING
  - Die-cast aluminum body
- LEDS
  - New generation LED
- FINISH
  - UV stabilized powder coated finish
- OPTIONS
  - Finish - Bronze. Color option with adder


OCCUPANCY SENSOR INSTRUCTIONS

The Passive infrared occupancy sensor to achieve tri-level dimming control, for some areas that require a light change notice before switch off.


It offers 3 levels of the light Control :100%--dimming light (0,10%,30%,50%)--off; and 2 periods of selectable waiting time: motion hold-time and stand-by time. Selectable daylight threshold and choice of detection area.




1  
With sufficient natural light, the light does not switch on when presence detected.



2  
When natural light is insufficient, the sensor automatically turns on the light if someone passes by.



3  
People left, light still dims to 0/10%/30%/50% (options) standby level after the hold time.




4  
Light switches off automatically after after stand-by time elapsed

OPERATING INSTRUCTIONS

3 WATTAGE SELECTABLE  
65 / 45 / 25W

3 CCT SELECTABLE  
5000K / 4000K / 3000K

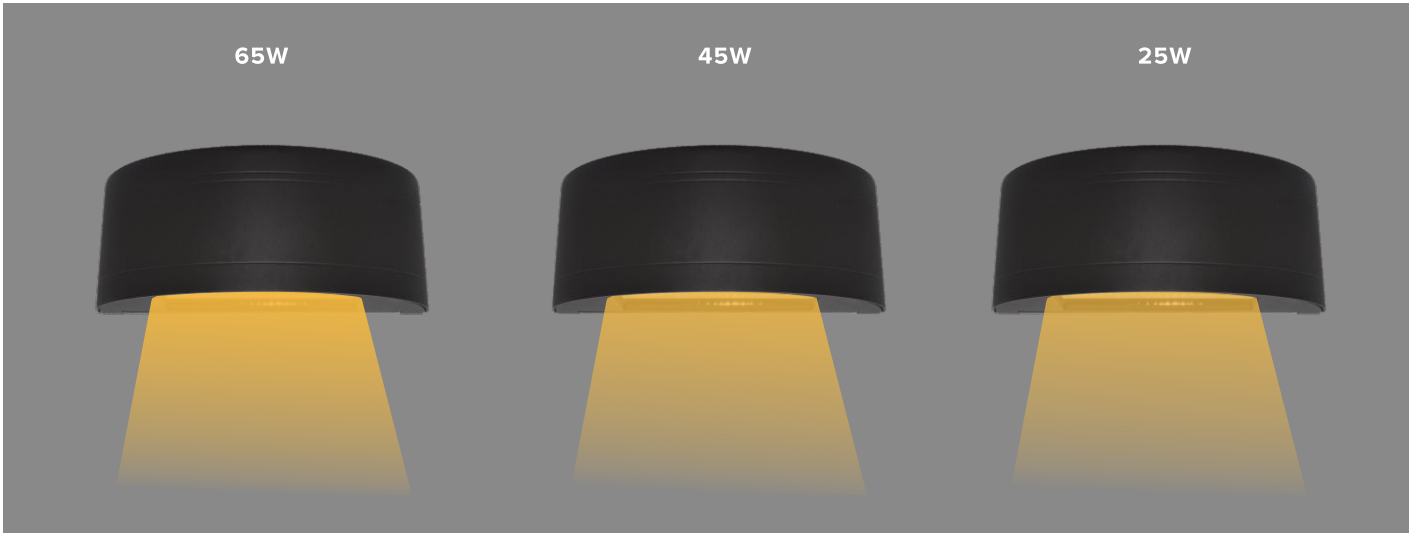

PERFORMANCE DATA


Model No.	SML-301N	SML-302N	SML-302N-U/D	SML-303N
Nominal Wattage	25/45/65W	25/45/65W	25/45/65W	25/45/65W
Lumens*	8183 lm*	7993 lm*	10258 lm*	8003 lm*
Efficacy*	125 lm/W*	123 lm/W*	157 lm/W*	124 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 5000K				

SPECIFICATION


Example:SML-301VB065UNV7TXT3ST-XXXXXX

Model No.	SML-301N	SML-302N	SML-302N-U/D	SML-303N
Nominal Wattage	065=65W			
Input Voltage	UNV=120-277VAC			
CRI	7=70+			
Color Temp	TX=3000K / 4000K / 5000K			
Distribution	FT= Forward Throw / WT= Wide Throw			
Option	BLANK = No Sensor PC = Photocell OC = Occupancy Sensor EM = Emergency Driver SS = 10KV Surge			
Finish	BN=Bronze			
Operating Temp	-40°C - +40°C			


DIMENSION

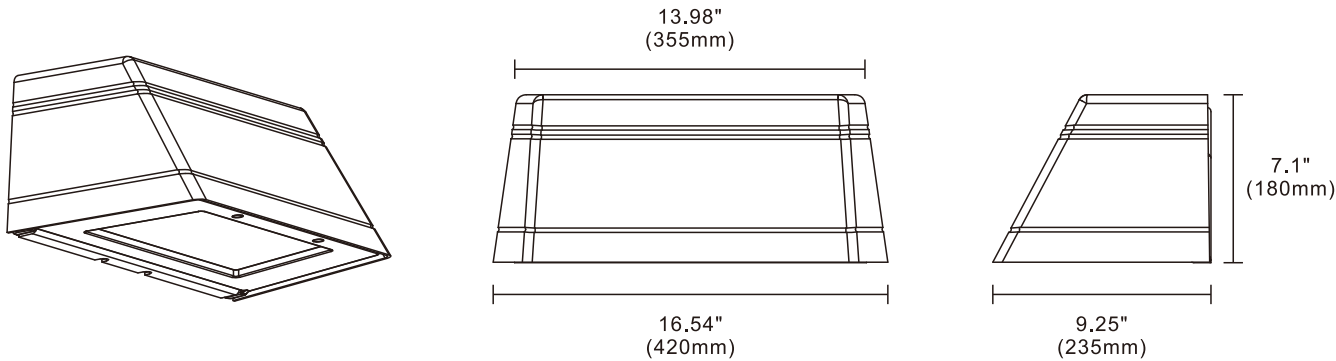

SML-301N

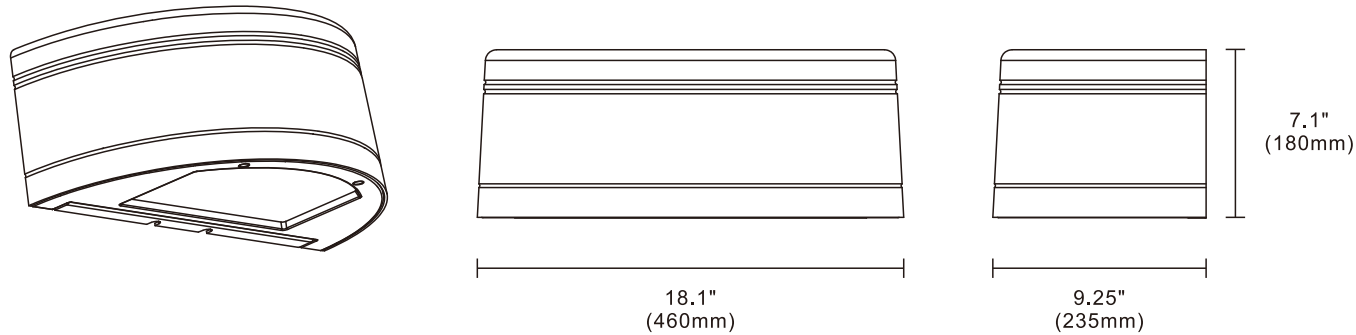

SML-302N & SML-302N-U/D

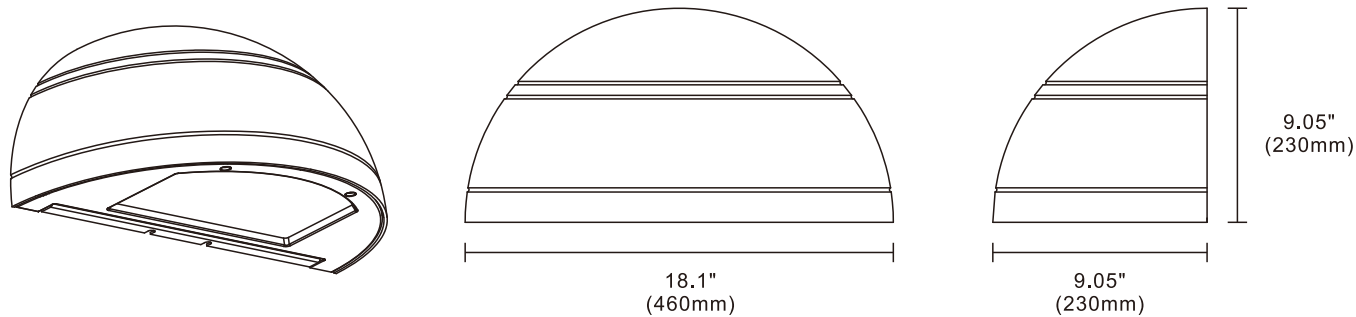

SML-303N