

Grandlite®

Dock Light LED-2030M



APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site

Meets DLC 5.1
Requirements




2021-12

Dock Light

Grandlite®

Product Description:

Strong magnetic plate for easy mounting on varieties of surfaces.

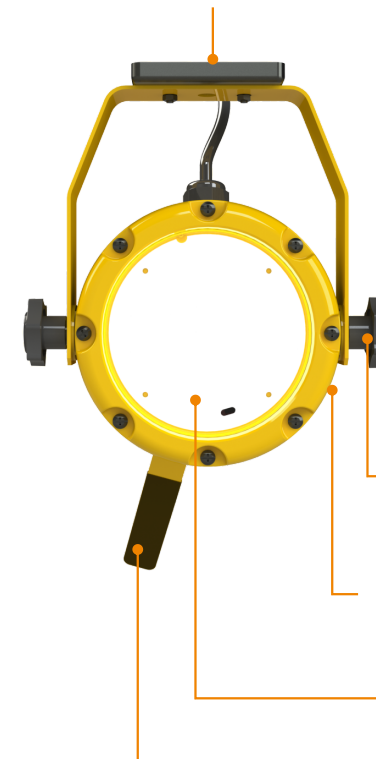

Tool-less knob for EZ tuning
Heavy duty die-cast aluminum

360 degree horizontal rotation with no blind spot



WET LOCATION on/off switch for easy quick access

High Impact Polycarbonate lens

Hand handle for quick movement



Product Description:

360-degree heavy duty dock light is perfect for different construction sites. With strong magnetic mounting plate, this dock light can be easily installed on different surfaces. In addition, the adjustable knobs and built-in on/off switch allow for easy access of the fixture. Utilizing high performance lumen output and long lasting driver, this dock light will last for years to come.

Optional Kelvin color* with adder.



Scan QR CODE
for more information

Features:

LISTING

► UL and CUL listed for damp locations

HOUSING

► Heavy duty die-cast aluminum

FINISH

► UV stabilized powder coated finish

OPTIONS

► Finish - Yellow. Color options with adder

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Performance Data


Model NO.	System Watts	Lumens	Efficacy
LED-2030M	28W	3364 lm	122 lm/W

Specification:

Example:LED-2030M

Model No.	System Watts	Input Voltage	CRI*	Color Temp*	Finish	Distribution	Option
LED-2030M	30W	UNV=120-277VAC	7=70+	50=5000 K	Yellow	Type V	BLANK = No Sensor

Dimension:

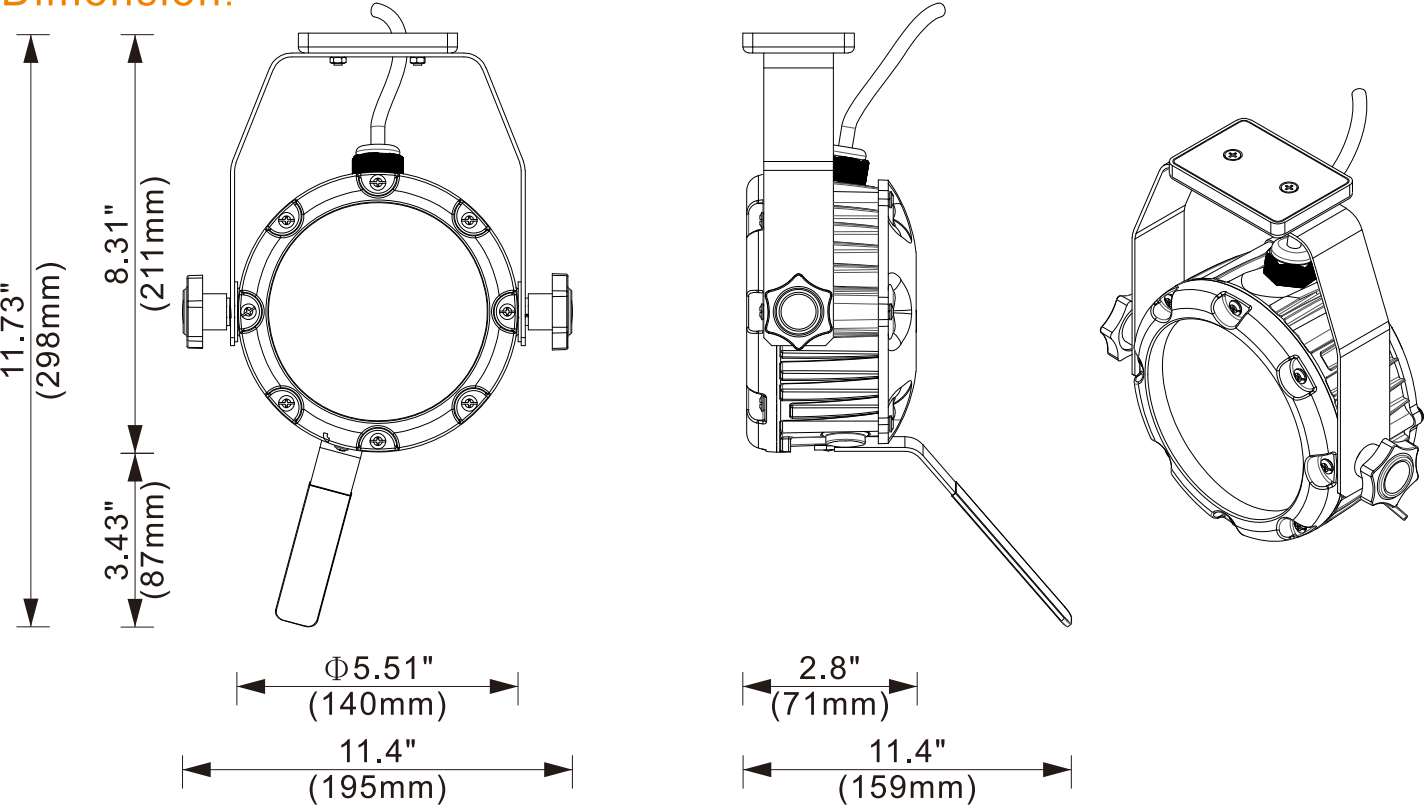

505 S. Yorbita Road, City of Industry, CA 91744, USA
Tel: (626) 839-8868 Fax: (626) 581-8099
e-mail: sales@grandlite.com
www.grandliteled.com



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

505 S. Yorbita Road, City of Industry, CA 91744, USA
Tel: (626) 839-8868 Fax: (626) 581-8099
e-mail: sales@grandlite.com
www.grandliteled.com



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.