

Grandlite® TUNABLE LED HIGH BAY

LED-4650V



APPLICATIONS


	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges



Meets DLC 5.1
Requirements



PRODUCT DESCRIPTION:

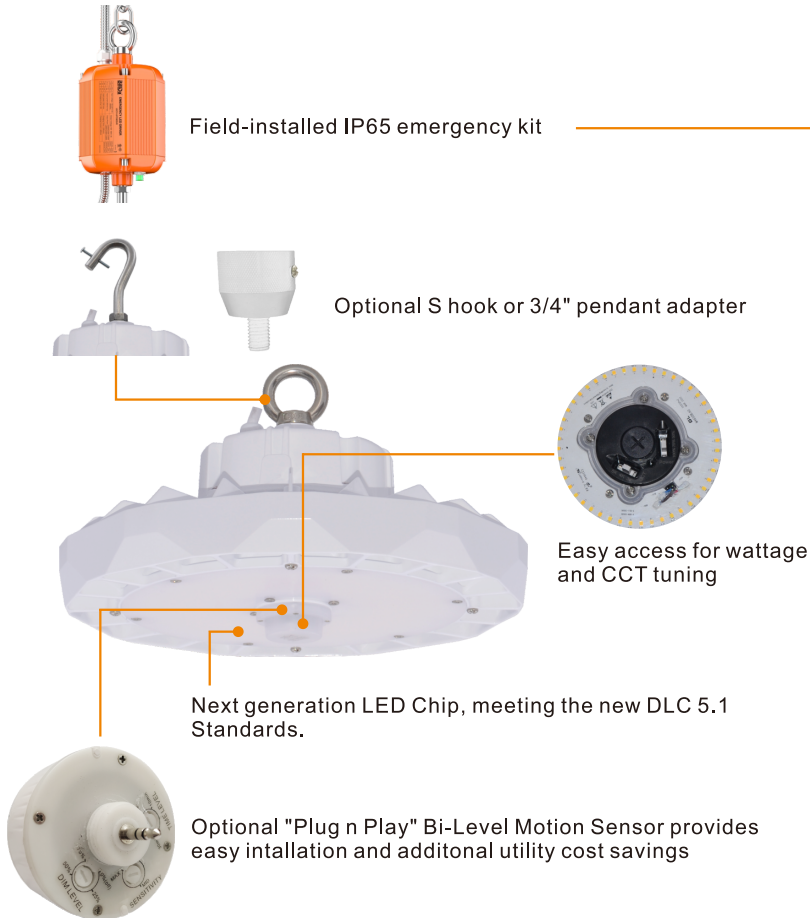

Product Description:

A unique feature is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.



Scan QR CODE
for more information

Features:

LISTING

- ▶ UL and CUL listed for damp locations

HOUSING

- ▶ Superior heavy duty die cast aluminum construction

OPTIONS

- ▶ Optional 347V with adder
- ▶ Acrylic reflector, AL reflector
- ▶ 16" Flat glass, Drop lens, Conical drop lens
- ▶ 6KV Surge
- ▶ 1-10V Dimming



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Performance Data

Model NO.	Nominal Watts**	Lumen**	Efficacy**
LED-4650V	135/180/240W	31535 lm**	125 lm/W*
** Lumen and Efficacy are based on highest wattage 5000K			

Specification:

Example: LED-4650V

Model No.	Nominal Watts**	Input Voltage	CRI	Color Temp*	Distribution	Optional Accessories	Finish	Starting Temp
LED-4650V	240=240W	UNV=120-277V	8=80+	40=4000 K 45=4500 K 50=5000 K	T5=Type V	FC = 16" Flat Glass and Clamp Band A = 16" Drop Lens with Clamp Band Y = 16" Conical Drop Lens with Clamp Band ALW = Aluminum Refractor White ALS = Aluminum Refractor Gloss AC = Acrylic Refractor Clear ACM = Acrylic Refractor Matte WG = 16" Wire Guard OCC = Microwave Occupancy Sensor EM = 30W Emergency Driver	WH=White BK=Black	-40°C

Accessories:



LED-4650-FC

LED-4650-ALW


LED-4650-ALS

LED-4650-AC

LED-4650-ACM



16" Flat Glass And Clamp Band



16" Wire Guard



16" Conical Drop and Clamp Band



16" Drop Lens and Clamp Band




Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

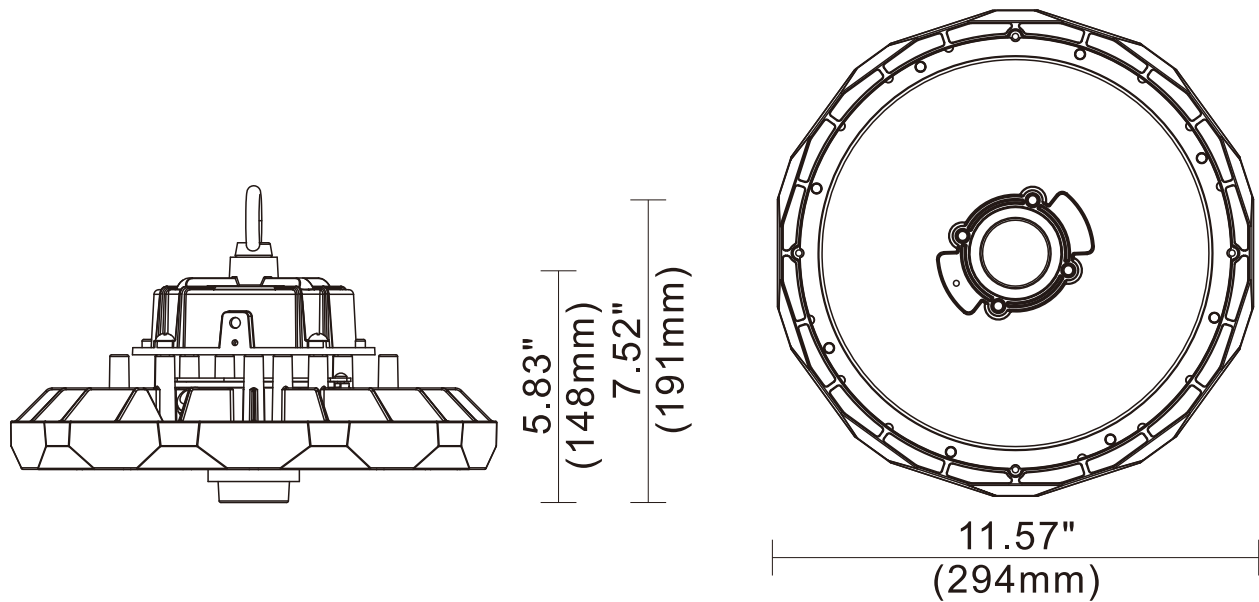

505 S. Yorbita Road, City of Industry, CA 91744, USA
Tel: (626) 839-8868 Fax: (626) 581-8099
e-mail: sales@grandlite.com

www.grandliteled.com



Scan QR CODE
for more information