

FLL-206-L2



This compact but powerful flood light is a true innovation combining practicality and aesthetics. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. Multiple mounting methods enable this fixture to be installed in any given environment.




Slip fitter




Trunnion

Optional mounting and Kelvin color* with adder.

Dimensions

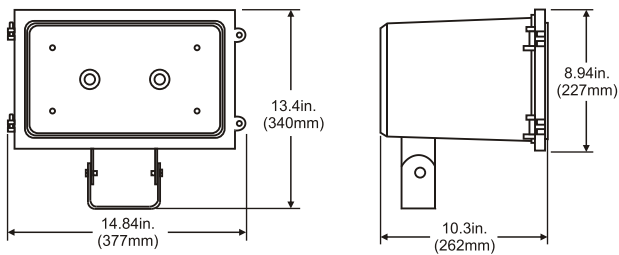

Line Drawing



Features

- IP65
- Solid construction die-cast aluminum body
- UL and CUL listed for wet locations
- Optional optic lenses with adder
- Optional photo control with adder
- UV stabilized powder coated finish
- Finish - Bronze. Color options with adder

Specification

Model No.	System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Equivalent
FLL-206-L2	42	3536lm**	5000K	480MA	120~277V	70+	-40°C	175W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Powered by CREE LEDs



IP65

www.grandlite.com
Fixture Catalog V3.0