

Powered by **CREE** LEDs



LED High Bay LED-467F

A unique feature is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.



AVAILABLE OPTIONS



Hook

FEATURES

LISTING

UL and CUL listed for damp locations

HOUSING

Superior heavy duty die cast aluminum construction

High impact polycarbonate lens


OPTIONS

Optional 347V with adder


SPECIFICATION

Model No.	LED-467-F L3	LED-467-F L5	LED-467-F L9	LED-467-F L432
System watts	115	161	215	233
Lumen Output	13950 lm**	17929 lm**	26433 lm**	31354 lm**
Color	5000K			
MA	966MA	780MA	600MA	93MA
Input Voltage	120~277V			
CRI	70+			
Starting Temp	-40°C			
Equivalent	250W MH	250W MH	400W MH	1000W MH

DIMENSIONS

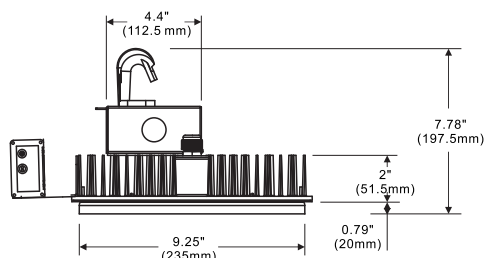

LINE DRAWING

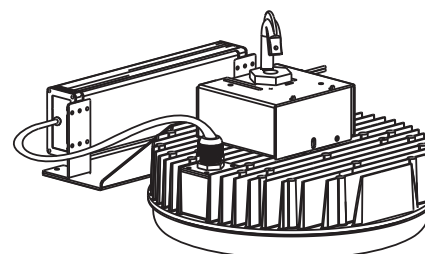

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.