

# LED High Bay LED-465



Powered by **CREE** LEDs



A unique feature is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.

## AVAILABLE OPTIONS



Hook



Optional clamp band and flat glass

## FEATURES

### LISTING

UL and CUL listed for damp locations

### HOUSING

Superior heavy duty die cast aluminum construction

Anodized aluminum reflector

### OPTIONS


Optional 347V with adder

Optional clamp band and flat glass with adder


## SPECIFICATION

Model No. ▶	LED-465-L3
System watts ▶	115
Lumen Output ▶	13950 lm**
Color ▶	5000K
MA ▶	966MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	250W MH

## DIMENSIONS

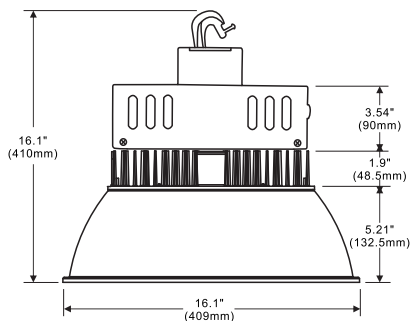

## LINE DRAWING



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.