

LED Canopy Light SML-009

Powered by **CREE** LEDs



The ruggedly designed LED canopy fixture will outlast the competition. With light output of a typical 70W-150W metal halide it is an energy efficient replacement. Two sizes available allow these fixtures to be used in a wide variety of locations.



Optional Kelvin color* with adder.

AVAILABLE OPTIONS



Optional photo control

FEATURES

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

High-impact acrylic diffuser

OPTIONS

Optional photo control


Optional 347V with adder

Finish - Bronze. Color option with adder


SPECIFICATION

Model No. ▶	SML-009
System watts ▶	20
Lumen Output ▶	2014 lm**
Color ▶	5000K
MA ▶	480 MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	70-100W MH

DIMENSIONS

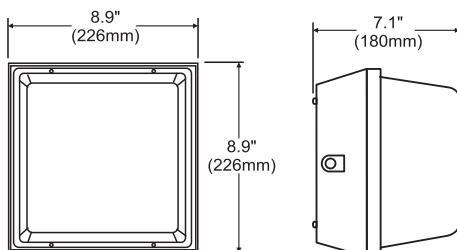

LINE DRAWING

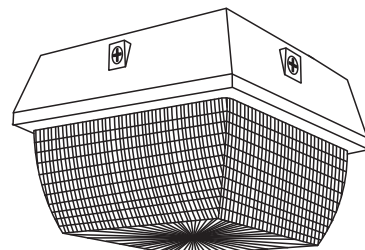

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.