



# LED Surface Mount Light

## LED-1503



### Product Description:

Architectural design incorporated with high performance LED light engine. This luminaire performs efficiently and steadily in any given environment. Uniform light distribution is delivered through a frosted diffuser. It is ideally used for condos, apartments, hotels, porches, and is suitable for indoor and outdoor spaces to replace old-fashioned incandescent Jelly Jars.

Optional mounting and Kelvin color\* with adder.

### Features:

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Die-cast aluminum body

#### LEDS

New generation COB technology

#### FINISH

UV stabilized powder coated finish

#### LENS

High - impact polycarbonate diffuser

#### OPTIONS

Optional photo control-120V only with adder

Finish - Bronze. Color option with adder

#### Installation

Quick mount installation

### Available Options




Optional photo control




Quick mount

### Line Drawing



### Dimensions

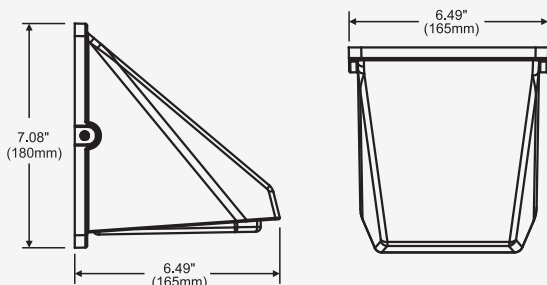

### Specification

Model No.	▶	LED-1503
System watts	▶	13
Lumen Output	▶	1606 lm**
Color	▶	5000 K
MA	▶	300 MA
Input Voltage	▶	120~277V
CRI	▶	70+
Starting Temp	▶	-40°C
Equivalent	▶	50W MH

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.