



Available Options



Trunnion



Slip Fitter



Pole Mount

Product Description:

This sleek and modern luminaire has been designed to handle any environment. With a beautiful slimline design along with one of the highest lumen performance on the market, this versatile fixture can be used as a flood light or an area light. Including a multitude of mounting options, surge protection devices, IOT photocell capability, and the most technologically advanced LED's on the market, the LED6015 is ready to conquer the lighting landscape.

Optional Kelvin color* with adder.

Features:

LISTING

- UL and cUL listed for wet locations

HOUSING

- One piece die-cast aluminum body with die-cast hinge panel for easy installation access.

LEDS

- The most technologically advanced LED chips in the market

FINISH

- UV stabilized powder coated finish

LENS

- Optional Type III, Type IV, Type V optics

OPTIONS

- Optional 347V or 480V with adder
- Bi-Level Dimmable or Photocontrol optional available with adder
- Finish - Bronze. Color option with adder
- Standard 4kV surge

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



IP65



Performance Data

Model No.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-6015-L224	72W	Type III	10866 lm**	151 lm/W	3	1	3
LED-6015-L224	98W	Type III	15470 lm**	157 lm/W	3	1	3
LED-6015-L336	148W	Type III	23524 lm**	159 lm/W	3	1	3


Specification:

Example:LED-6015


Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
LED-6015	072=72W 098=98W 148=148W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	T3=Type III T4=Type IV T5=Type V	XS=10kv Surge OS=Occupancy Sensor PE=Photocontrol 3R=3-pin Receptacle 5R=5-pin Receptacle 7R=7-pin Receptacle	PM=Pole Mount SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C

Dimension:


LED-6015PM

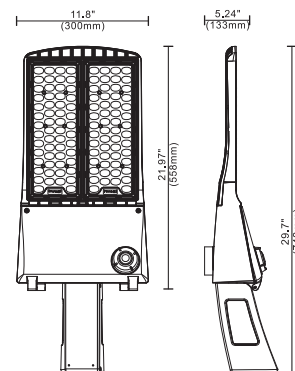

LED-6015SF

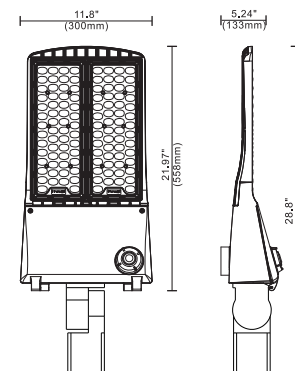

LED-6015TR



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



IP65