




**Grandlite®**  
HIGH POWER LIGHTING SYSTEM  
**LED Flood Light**  
**LED-2150**




**Grandlite®**  
HIGH POWER LIGHTING SYSTEM  
**LED Flood Light**  
**LED-2150**




**Available Options**

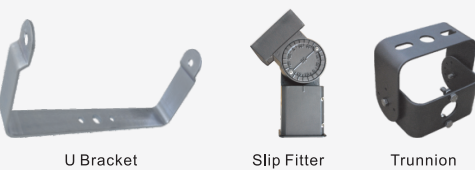

**Line Drawing**



**Dimensions**

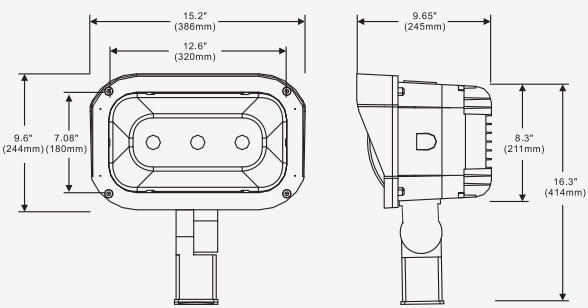

**Product Description:**

The LED-2150 is a powerful luminaire that has been designed to meet a wide variety of locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsink, the fixture can maintain a high lumen output while keeping the LED modules at a cool temperature.

Optional mounting and Kelvin color\* with adder.

**Features:**

**LISTING**

UL and CUL listed for wet locations

**HOUSING**

Heavy duty die-cast aluminum powder coating, corrosion resistant hardware

**FINISH**

UV stabilized powder coated finish

**LENS**

Heat and impact resistant tempered glass

**OPTIONS**

Optional 347V with adder

Optional surge protector 10K with adder

Optional NEMA photo control with adder

Wide / narrow distribution available with adder

Finish - Bronze. Color option with adder

**Specification**

Model No.	LED-2150-L3	
System watts	150	197
Lumen Output	16061lm**	23000 lm**
Color	5000K	
MA	1200MA	1150MA
Input Voltage	120~277V	
CRI	70+	
Starting Temp	-40°C	
Equivalent	250W MH	400W MH

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

**Product Description:**



**Specification:**

Example: LED-2150

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option		Finish	Starting Temp
					Accessories	Mounting		
LED-2150	150=150W 197=197W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	XS=10kv Surge PE=Photocontrol 3R=3-pin Receptacle 5R=5-pin Receptacle 7R=7-pin Receptacle	PM=Pole Mount SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

