

Grandlite®
HIGH POWER LIGHTING SYSTEM

Flood Light And Area Light

LED-6073



APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site

AVAILABLE OPTIONS



Trunnion



Slip Fitter



Pole Mount



IP65

2019-11

Product Description:




Door Frame

The door frame is designed with the installer in mind. It has a simple to use hinge access, allowing installers to be hands-free when entering electrical compartment. This saves time and money.

Photocontrol

Optional photocontrol allows for further energy saving.

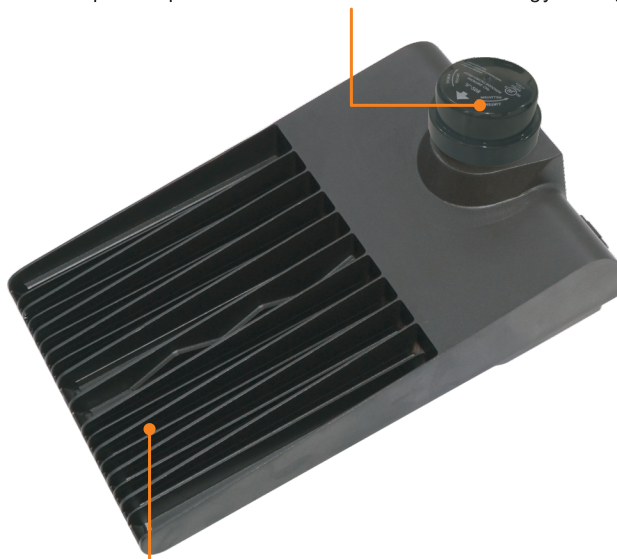

Integrated Heatsink

Integrated cooling fin provides excellent thermal dissipation. This design allows the fixture to have extremely long lifetime hours.

Product Description:

This sleek and modern luminaire has been designed to handle any environment. With an appealing slimline design along with one of the highest lumen performance on the market, this versatile fixture can be used as a flood light or an area light. Including a multitude of mounting options, surge protection devices, IOT photocell capability, and the most technologically advanced LED's on the market, the LED-6073 is ready to conquer the lighting landscape.

Optional Kelvin color* with adder.

Features:

LISTING

► UL and cUL listed for wet locations, DLC Premium

HOUSING

► One piece die-cast aluminum body with die-cast hinged driver access for easy installation

LEDS

► The most technologically advanced LED chips in the market

FINISH

► UV stabilized powder coated finish

LENS

► Optional Type III, Type IV, Type V optics

OPTIONS

► Finish - Bronze. Color option with adder

► Standard 4kV surge

Performance Data

Model NO.	System Watts	Lumens	LPW
LED-6073-L192	222W	27500 lm**	124 lm/W
LED-6073-L264	308W	38017lm**	123 lm/W

Specification:




Example: LED-6073

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
LED-6073-L192	222=222W	UNV=120-277V	7=70+	40=4000 K	T3=Type III	PE=Photocontrol	W=Wall Mount	BZ=Bronze	-40°C
LED-6073-L264	308=308W			50=5000 K	T4=Type IV				
					T5=Type V				

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

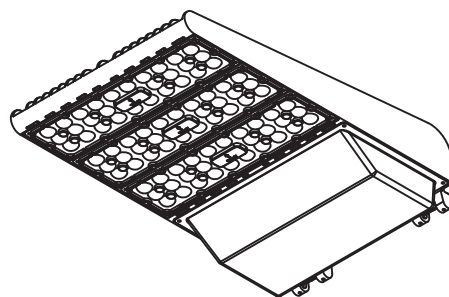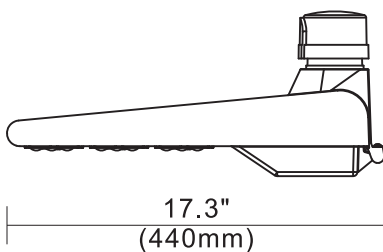



505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com



www.grandliteled.com