


GRPL-008/009





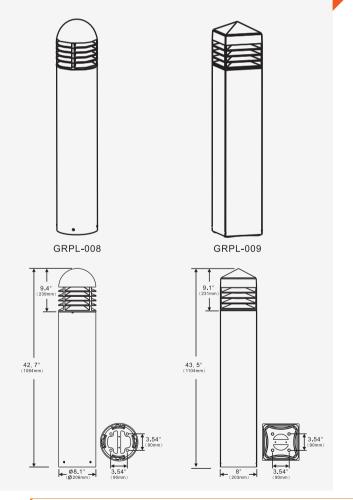

Product Description:

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Consisting of an extruded aluminium alloy body

Standard 4kV Surge

FINISH

UV stabilized powder coated finish

LENS

High-impact polycarbonate diffuser

OPTIONS

Anodized aluminum reflector

Finish - Bronze

Specification		
Model No.	GRPL-008	GRPL-009
System watts	40	40
Lumen Output	740 lm**	740 lm**
Color	5000K	
MA •	950MA	
Input Voltage	120~277V	
CRI 🕨	70+	
Starting Temp	-40°C	
Equivalent >	100W MH	100W MH

^{*} Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

^{**} DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.

Actual production units may vary from the values reported here by up to ±10%.



