



LED Surface Mount Light

LED-2850B



Available Options



Thru Wiring



Photo Control



Quick mount



Wiring compartment



Trunnion



Slip fitter

Product Description:

This newly designed luminaire with built-in heatsink in casting featuring its versatility that can be served as wall light, flood light and etc. Incorporated with high performance LED module along with high quality optical reflector, this fixture performs efficiently and steadily against harsh outdoor environment .

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

High-impact resistant tempered glass

OPTIONS

Optional photo control with adder

Finish - Bronze. Color option with adder

Specification

Model No.	LED-2850B	
System watts	83	146
Lumen Output	8519 lm**	15511 lm**
Color	5000 K	
MA	500 MA	900 MA
Input Voltage	120~277V	
CRI	70+	
Starting Temp	-40°C	
Equivalent	250W MH	250W-400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



LED Surface Mount Light

LED-2850B



LED-2850




LED-2850-SF



LED-2850-TR

Dimensions

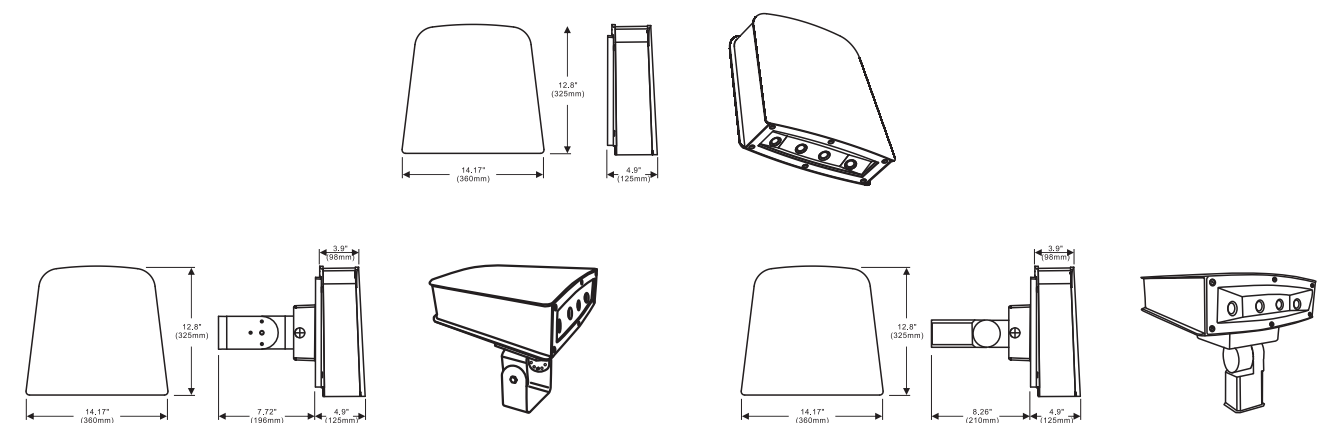

Line Drawing

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

