



Grandlite®
HIGH POWER LIGHTING SYSTEM

LED Surface Mount Light

LED-708



Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 250 W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant borosilicate glass

OPTIONS

Optional 347V with adder

Dimmable option with adder


Finish - Bronze. Color option with adder

Optional wire guard / visor with adder

Available Options




Wire Guard




Visor

Line Drawing

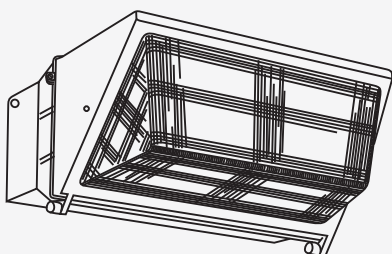

Dimensions

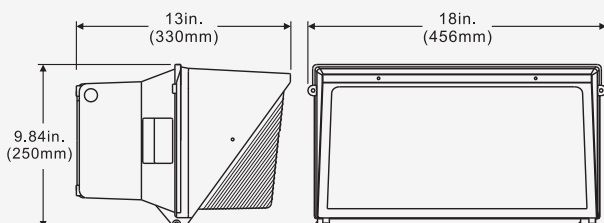

Specification

Model No. ▶	SML-708-L4
System watts ▶	120
Lumen Output ▶	15774 lm**
Color ▶	5000K
MA ▶	800MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

