



Grandlite®

HIGH POWER LIGHTING SYSTEM

LED Canopy Light

LED-368




Available Options




Quick mount

Line Drawing



Dimensions

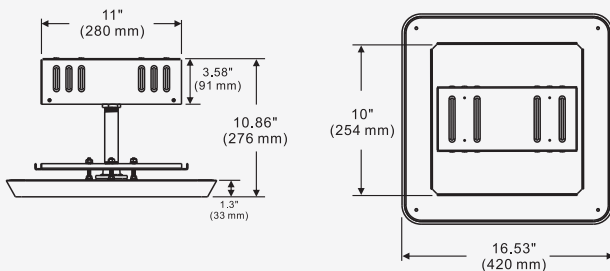

Product Description:

Heavy-duty die-cast construction with modular LED light engine design. This slim-profile luminaire can be perfectly used in gas station, parking garage, canopy, or high ceilings. It provides an easy installation with quick mount structure for contractors to work safely and easily in the confined-space areas.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized power coated finish

LENS

Heat and impact resistant tempered glass

OPTIONS

Finish - White. Color option with adder

Specification

Model No. ▶	LED-368			LED-368-L192
System watts ▶	99	130	186	165
Lumen Output ▶	12560 lm**	15362 lm**	19246 lm**	21120 lm**
Color ▶	5000 K			5000 K
MA ▶	625 MA	800 MA	800 MA	130 MA
Input Voltage ▶	120~277V			120~277V
CRI ▶	70+			70+
Starting Temp ▶	-40°C			-40°C
Equivalent ▶	250W MH	250W MH	400W MH	400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.