Grandlite®
HIGH POWER LIGHTING SYSTEM

Grandlite®
HIGH POWER LIGHTING SYSTEM

LED High Bay

LED-4671

Product Description:

Driver for easy installation and replacement.

Heavy-duty one complete piece die cast provides maximum heat dissipation. Cooling fins are added to increase the ambient temperature to 50℃ standard.

New Generation LED Chips inside, cover with round elegant clear Tempered Glass

Product Description:

A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heatsink and comes with a hook made of die-cast aluminum for a strong and easy installation.

Features:

LISTING

▶UL and CUL listed for damp locations

HOUSING

▶Superior heavy duty die cast aluminum construction

OPTIONS

▶Optional 347V with adder

▶Acrylic reflector, AL reflector

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

www.grandliteled.com

Grandlite®
HIGH POWER LIGHTING SYSTEM

LED High Bay

LED-4671

Accessories Options 1:

Options available with Aircraft Spun Aluminum Powder painted in White or PMMA reflector.

LED-4671-F

LED-4671-AL

LED-4671-A

Accessories Options 2:

16" Flat Glass And Clamp Band

16" conical Lens And Clamp Band



16" Wire Guard

16" conical Lens And Clamp Band

Performance Data

Model No.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-4671-L132	59W	Type VS	7618 lm**	129 lm/W	3	2	1
LED-4671-L216	100W	Type VS	13030 lm**	130 lm/W	3	2	1

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Grandlite®
HIGH POWER LIGHTING SYSTEM

LED High Bay

LED-4671

Specification:

Example:LED-4671-L132060UNV740T5-FFCGY

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories 1	Accessories 1		
LED-4671-L132 **LED-4671-L216**	**059**=59W **100**=100W	**UNV**=120-277V	**7**=70+	**40**=4000 K **50**=5000 K	**T5**=Type V	**F**=Flat Glass **AL**=AL Reflector **A**=PMMA Reflector	**FC**=16" Flat Glass And Clamp Band **Y**=16" conical Lens And Clamp Band **WG**=16" Wire Guard **A**=16" conical Lens And Clamp Band	**GY**=Grey	**-40°C**

Dimension:

LED-4671-L132

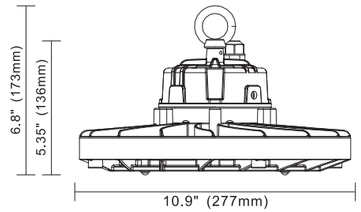



LED-4671-L216

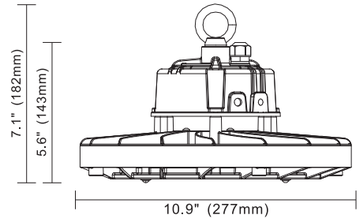



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

www.grandliteled.com