



Grandlite®

HIGH POWER LIGHTING SYSTEM

LED Post Top Light

LED-9500



Grandlite®


HIGH POWER LIGHTING SYSTEM

LED Post Top Light


LED-9500



Line Drawing

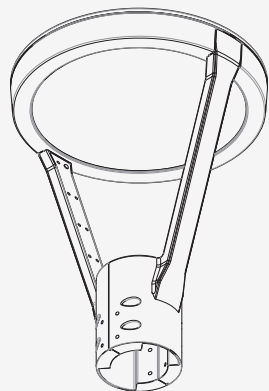

Dimensions

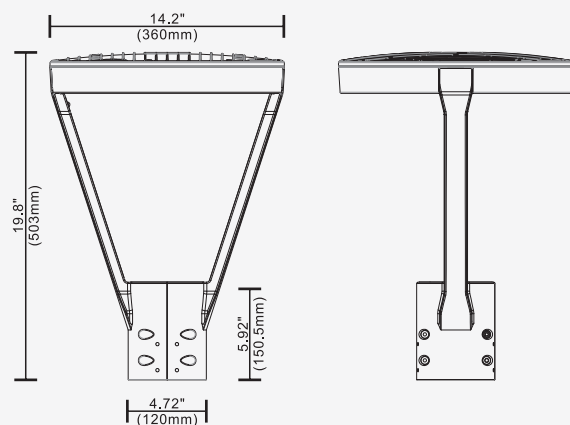

Product Description:

Ideal for parks, walkway, and commercial office buildings, applications where landscape lighting may come into use.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

► UL and CUL listed for WET LOCATIONS.

HOUSING

► Corrosion resistant heavy duty-cast aluminum construction. Standard 2 3/8" open on the bottom.

► Wiring Compartment on the Top for easy access and ease of installation.

FINISH

► Superior powder coat finish to withstand the toughest weather

OPTIONS

► Optional photocell with adder

Product Description:



Cooling channels allow vertical airflow

Optional Mount

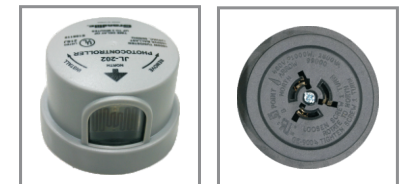


Photo control

480V Max
Receptacle



Specification:

Example: LED-9500

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Distribution	Finish	Starting Temp
LED-9500	057=57W	UNV=120-347V	7=70+	30=3000 K 40=4000 K 50=5000 K	T3=Type III T5=Type VS	BK=Black	-40°C

Performance Data

Model No.	Light Beads	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-9500	L216	57W	Type VS	5625 lm**	99 lm/W	4	3	3

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.