

Grandlite®

NARROW WRAP LIGHTING

LED-WR4-45P



APPLICATIONS


| | |
|--|------------------------|
| | Retails & Supermarkets |
| | Hotels & Restaurants |
| | Commercial Buildings |
| | Offices And Showrooms |
| | Schools & Colleges |



Meets DLC 5.1
Requirements



Product Description:

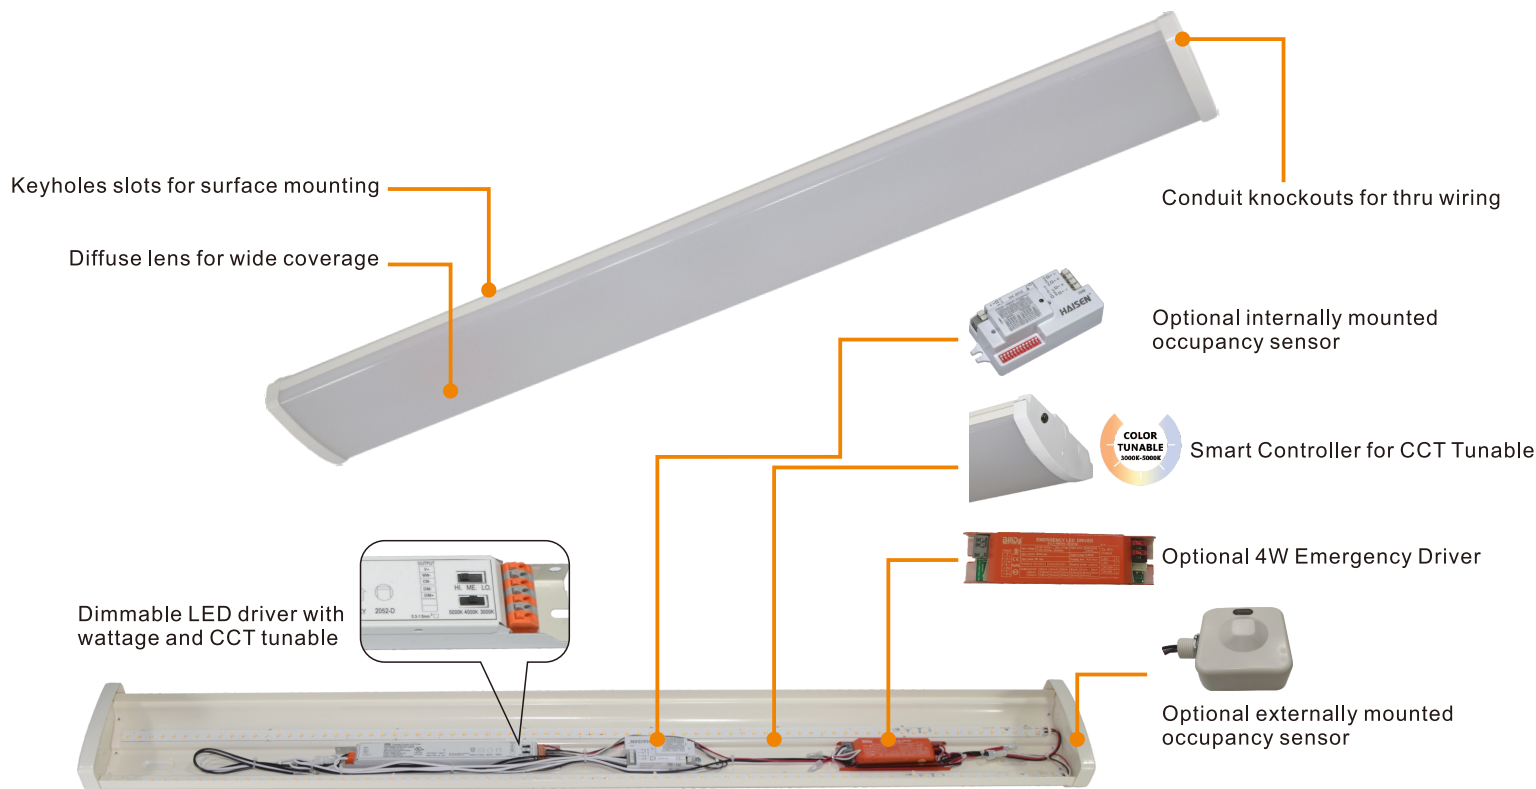

Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

- UL and CUL listed

HOUSING

- Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- Suitable for use in -40°C to +40°C

EFFICACY

- Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- 3000K, 4000K and 5000K CCT available, 80CRI

LENS

- Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;
- 2KV-4KV Surge.
- Dimming 0-10V driver Standard.
- Occupancy sensor (PIR) optional.

FINISHES

- Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Performance Data

| Model NO. | System Watts | Lumens* | Efficacy* |
|--|--------------|----------|-----------|
| LED-WR4-45P | 20/31/42W | 5362 lm* | 129 lm/W* |
| *Lumen and efficacy are based on highest wattage 5000K | | | |

Specification:


Example: LED-WR-P

| Model No. | System Watts | Input Voltage | CRI | Color Temp | Finish | Option |
|-------------|-------------------|--------------------|-------|--------------------------------------|----------|---|
| LED-WR4-45P | 20W 31W 42W | UNV= 120-277VAC | 8=80+ | 30=3000 K 40= 4000 K 50=5000 K | WH=White | FAO = Tunable Smart Controller BLANK = No Sensor OS = External/Internal Occupancy Sensor EM = Emergency Driver |

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

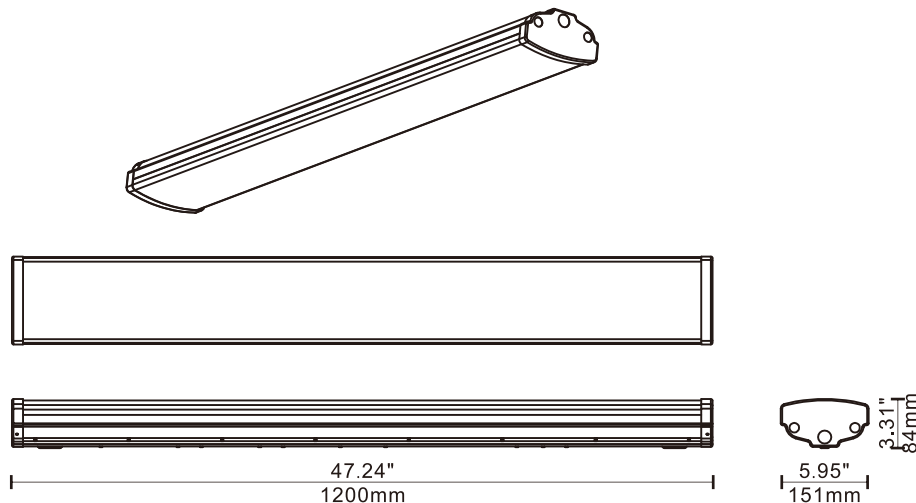

Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

NARROW WRAP LIGHTING

LED-WR4-45P

Grandlite®

505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com

 www.grandliteled.com

