



LED Surface Mount Light

SML-352



Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wallpack delivers a similar light output to a 70W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment, It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

Prismatic lens for uniform light distribution

OPTIONS

Photo control included


Finish - Bronze / White

Available Options




Optional photo control

Line Drawing



Dimensions

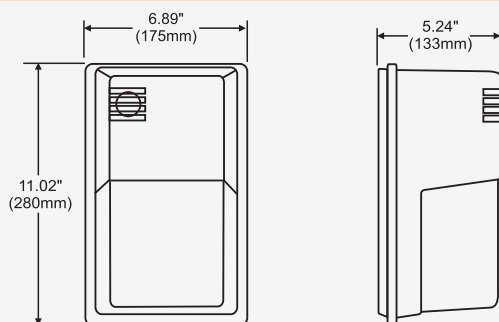

Specification

Model No. ▶	SML-352	
System watts ▶	15	19
Lumen Output ▶	1769 lm**	2131 lm**
Color ▶	5000K	
MA ▶	300 MA	480 MA
Input Voltage ▶	120~277V	
CRI ▶	70+	
Starting Temp ▶	-40°C	
Equivalent ▶	50W-70W MH	70W-100W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.