


Grandlite®

STRIP LIGHTING

LED-ST-S

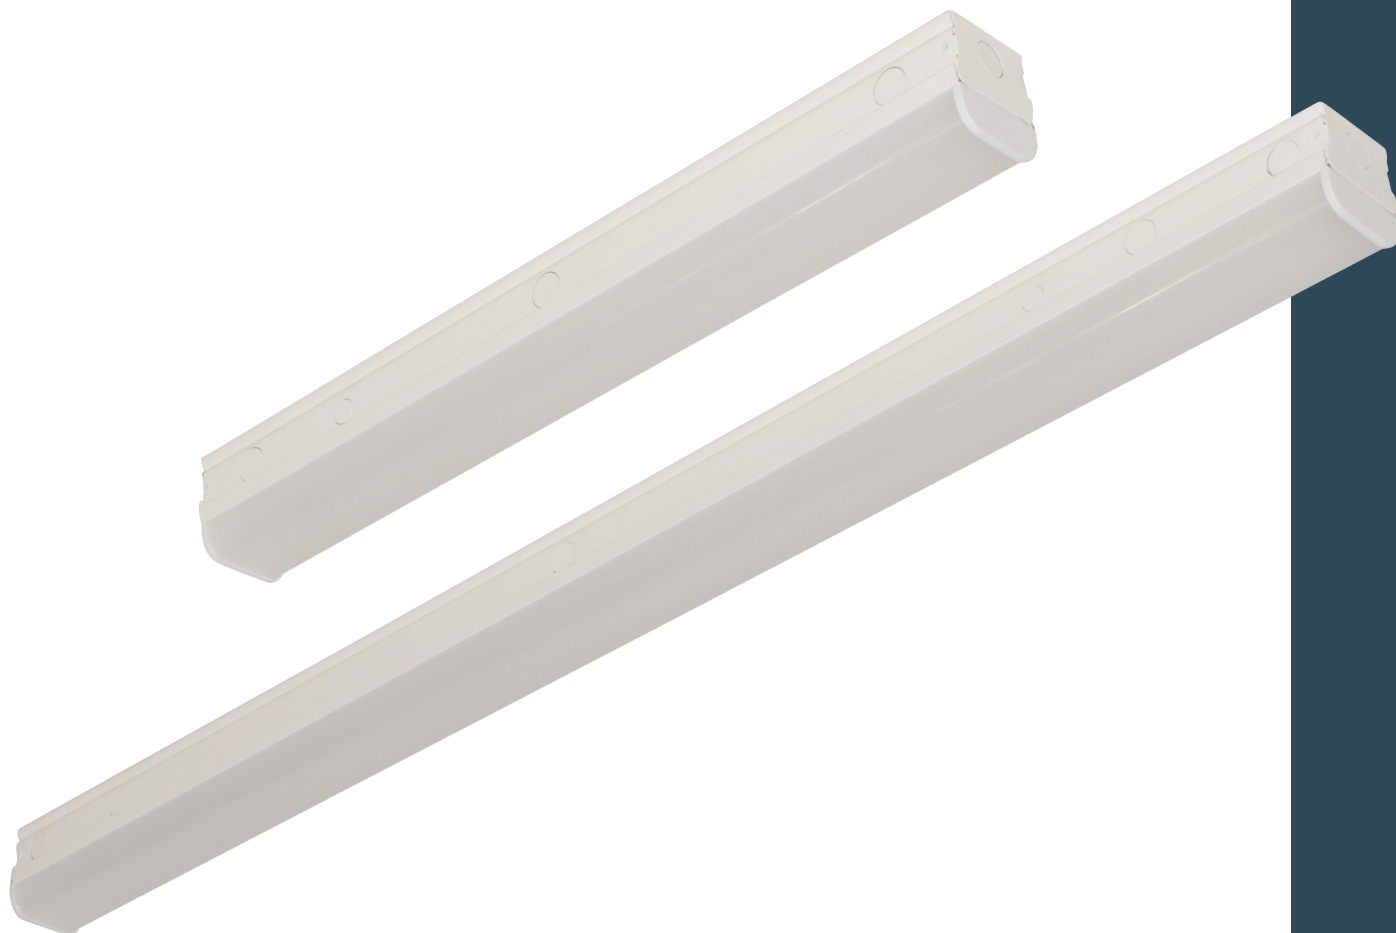


APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges

**Meets DLC
5.1 Standards**



Product Description:

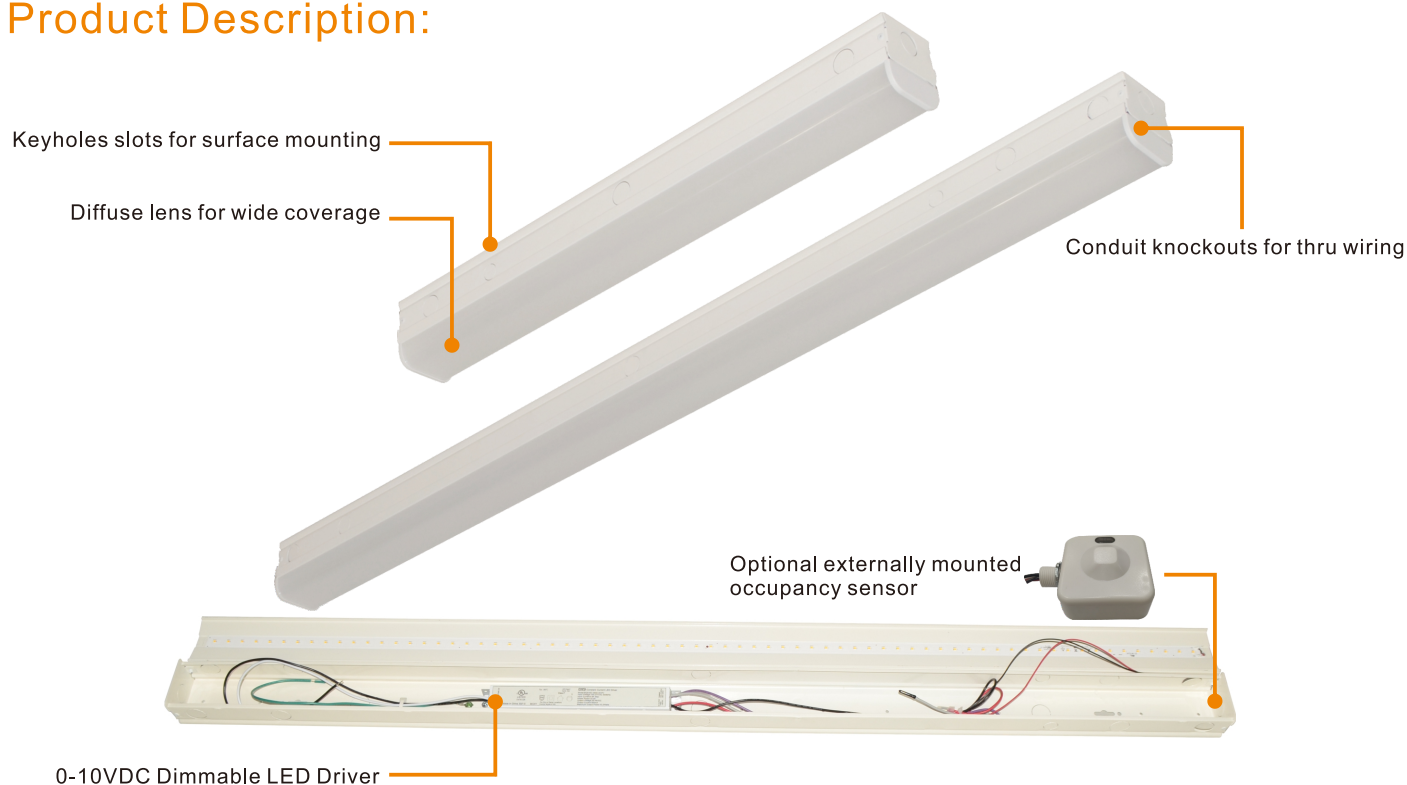

Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

- UL and CUL listed

HOUSING

- Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- Suitable for use in -40°C to +40°C

EFFICACY

- Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- 3000K, 3500K, 4000K and 5000K CCT available, 80CRI

LENS

- Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;
- 2KV-4KV Surge.
- Dimming 0-10V driver Standard.
- Occupancy sensor (PIR) optional.

FINISHES

- Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Performance Data

Model NO.	System Watts	Lumens*	Efficacy*	Linkable
LED-ST2-20S	20W	2668 lm*	133 lm/W*	2ft
LED-ST4-45S	43W	5565 lm*	128 lm/W*	4ft connect up to 8ft
*Lumen and efficacy are based on 5000K				

Specification:


Example: LED-ST-S

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-ST2-20S	20W	UNV= 120-277VAC	8=80+	40= 4000 K	WH=White	BLANK = No Sensor
LED-ST4-45S	43W			50=5000 K		OS = External Occupancy Sensor




* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Dimension:

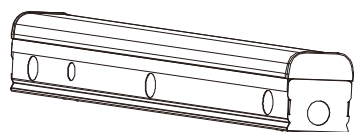

LED-ST2-20S

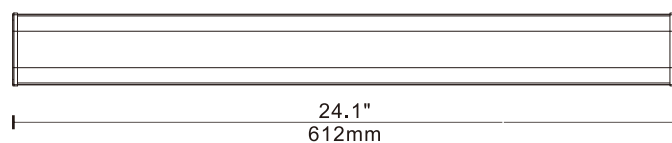


Scan QR CODE
for more information










* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Dimension:

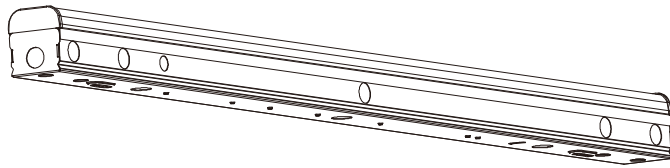

LED-ST4-45S

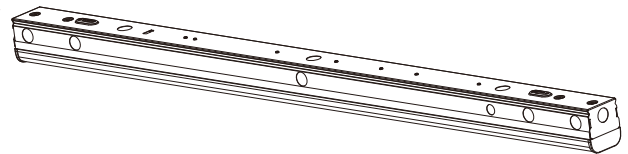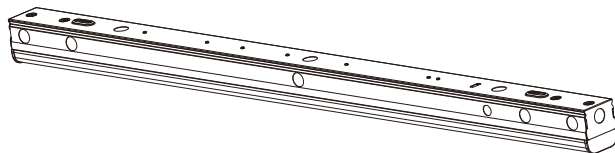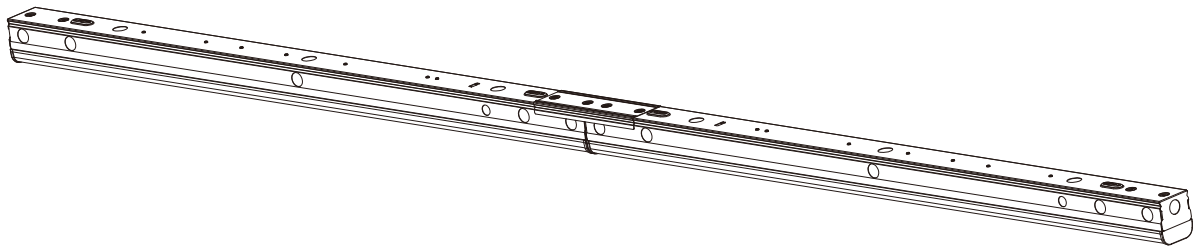

505 S. Yorbita Road, City of Industry, CA 91744, USA
Tel: (626) 839-8868 Fax: (626) 581-8099
e-mail: sales@grandlite.com

www.grandliteled.com



Scan QR CODE
for more information