



## Flood Light And Area Light LED-3017




### Product Description:


This sleek and modern luminaire has been designed to handle any environemnt. With an appealing slimline design along with one of the highest lumen performance on the market, this versatile fixture can be used as a flood light or an area light. Including a multitude of mounting options, surge protection devices, IOT photocell capability, and the most technologically advanced LED's on the market, the LED-3017 is ready to conquer the lighting landscape.

Optional mounting and Kelvin color\* with adder.

### Line Drawing

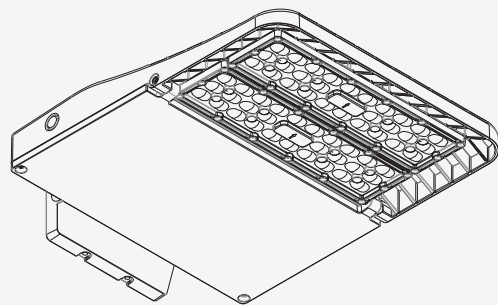

### Dimensions

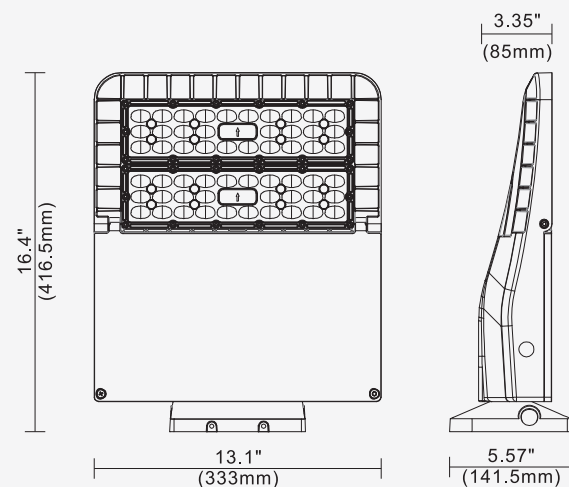

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



IP65



## Flood Light And Area Light LED-3017

### Product Description:



#### Integrated Heatsink

Integrated cooling fin provides excellent thermal dissipation. This design allows the fixture to have extremely long lifetime hours.



#### Redesigned Door Frame


The driver compartment access door has been reversed to open away from the mounting surface. This allows even more space for installers to work with.

#### Proprietary Optical Control

Specifically designed lens Type III, IV, and V allow architects maximum freedom to design any layout without restraint. These optics are engineered for maximum light output.



Optional Photocell



Quick mount bracket for easy install and wiring.

### Performance Data

Model NO.	System Watts	Lumens	Lpw
LED-3017-L224	100W	14962	146.4
	156W	21590	138.3

### Specification:

Example: LED-3017

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
LED-3017	100=100W 156=156W	UNV=120-277V	7=70+	30=3000 K 40=4000 K 50=5000 K	T3=Type III T4=Type IV T5=Type V	PE=Photocontrol	W=Wall Mount	BZ=Bronze	-40°C

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



IP65