



GRPL-10B-C

GRPL10B-S

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.  
Actual production units may vary from the values reported here by up to ±10%.



**Grandlite®**  
HIGH POWER LIGHTING SYSTEM  
**LED Bollard**  
**GRPL-10B-C/S**



**Grandlite®**  
HIGH POWER LIGHTING SYSTEM  
**LED Bollard**  
**GRPL-10B-C/S**

### Product Description:



### Product Description:

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

### Features:

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Consisting of an extruded aluminium alloy body

Standard 4kV Surge

#### FINISH

UV stabilized powder coated finish

#### LENS

High-impact polycarbonate diffuser

#### OPTIONS

Anodized aluminum reflector

Finish - Bronze

### Performance Data



Model NO.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
GRPL-10B-C/S	18 W	Type V	2035 lm**	113 lm/W	1	3	2
	36 W	Type V	3960 lm**	110 lm/W	1	3	2

### Specification:

Example: GRPL-10B018UNV750-XS-C

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
GRPL-10B	018=18W	UNV=120-277V	7=70+	40=4000 K	XS= 10kV Surge	C=Cylinder	Bronze	-40°C
	036=36W			50=5000 K	2S= 20kV Surge	S=Sphere		

### Dimension:

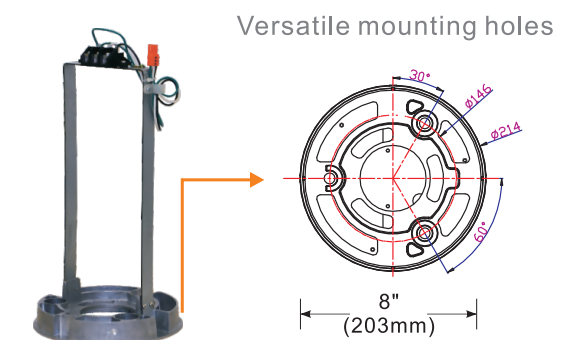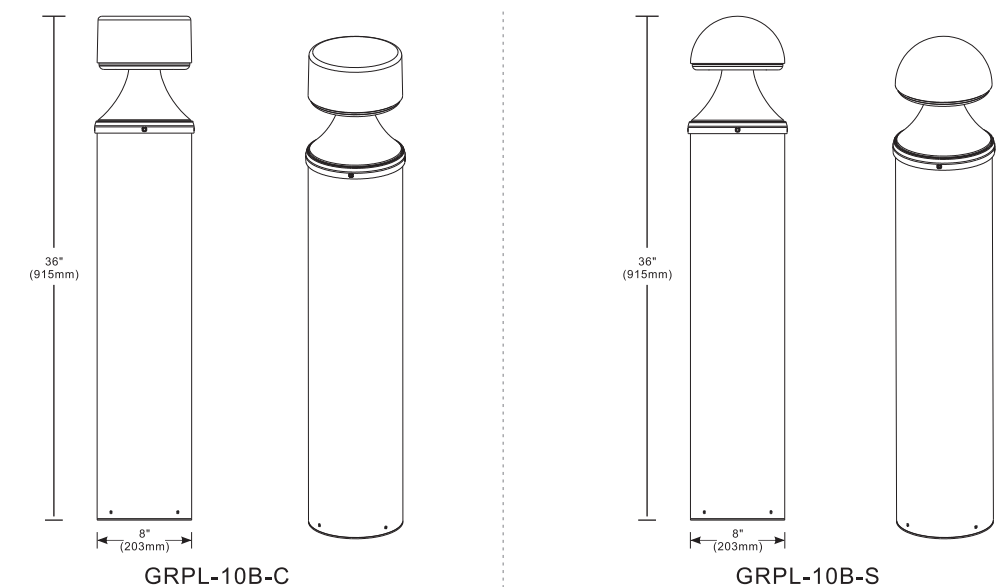

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.