



Product Description:

Heavy-Duty one piece die cast provides maximum heat dissipation. Cooling fins are added to increase the ambience temperature to 50°C standard.



Die cast hook is standard with the unit, saving time and money for the end customer. Pendant mounting option is also available, making the fixture more versatile.

Standard SE cable is included with the unit and provides the contractor with ease of installation



Uniquely designed prismatic lens provides ideal lighting coverage and minimum glare.



Bi-Level Occupancy sensor not only offers energy saving, but provide security to your warehouse as well.



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Product Description:

A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.

Optional Kelvin color* with adder.

Features:

LISTING

►UL and CUL listed for wet locations

FINISH

►UV stabilized power coated finish

LENS

►High impact polycarbonate frosted lens

OPTIONS

►Optional photo control with adder

►Finish - Bronze / White

Performance Data




| Model No. | Chip Quaility | System Watts | Dist. Type | Lumens | Lpw | B | U | G |
|-----------|---------------|--------------|------------|------------|----------|---|---|---|
| LED-8500 | L240 | 150W | Type VS | 19113 lm** | 126 lm/W | 4 | 3 | 3 |
| | L336 | 191W | Type VS | 24615 lm** | 129 lm/W | 4 | 3 | 3 |
| | L432 | 212W | Type VS | 27679 lm** | 130 lm/W | 4 | 3 | 3 |

Specification:

Example:LED-8500 150UNV740T5-XSBZ

| Model No. | SystemWatts | Input Voltage | CRI | Color Temp | Distribution | Option | Finish | Starting Temp |
|-----------|----------------------------------|---------------|-------|------------------------|--------------|--------------------------------------|-----------------------|---------------|
| | | | | | | Accessories | | |
| LED-8500 | 150=150W 191=191W 212=212W | UNV=120-277V | 7=70+ | 40=4000 K 50=5000 K | T5=Type VS | XS=10kv Surge OS=Occupancy Sensor | BZ=Bronze WT=White | -40°C |

Dimension:

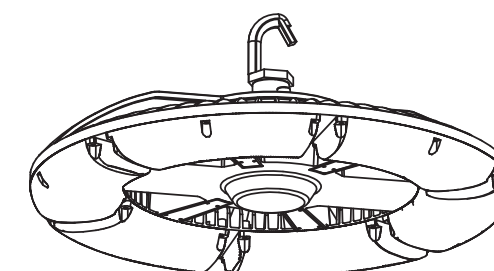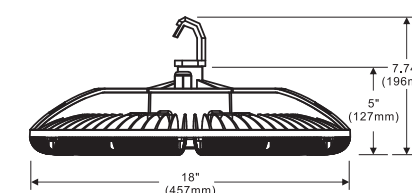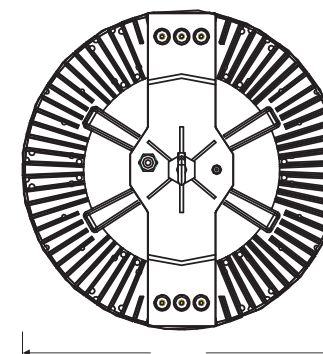

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.