



# LED Surface Mount Light

## LED-326-W



### Product Description:

This architectural LED luminaire is suitable for many environments. It can be wall-mounted, pendant-mounted, and canopy-mounted. It can be used for indoor purposes as well as outdoor environments. Utilizing patented heat sink design to lower Tj temperature, this luminaire can last for a very long time with very little lumen depreciation. With various optics available, this product is a lighting designer's perfect companion!

Optional mounting and Kelvin color\* with adder.

### Features:

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Solid construction die-cast aluminum body

#### FINISH

UV stabilized powder coated finish

#### LENS

25 degree optic lenses available with adder

#### OPTIONS


Finish - Gray. Color option with adder

### Available Options




25° Optics available

### Line Drawing



### Dimensions

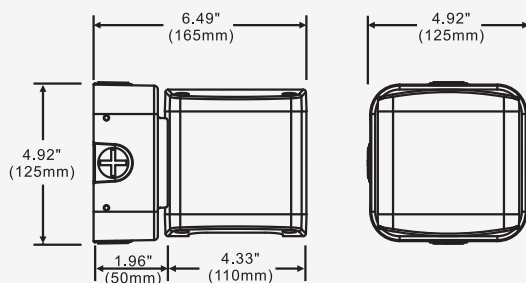

### Specification

	LED-326-W	LED-326-WS
Model No. ▶	LED-326-W	LED-326-WS
System watts ▶	13	
Lumen Output ▶	1414 lm**	
Color ▶	5000 K	
MA ▶	300 MA	
Input Voltage ▶	120~277V	
CRI ▶	70+	
Starting Temp ▶	-40°C	
Equivalent ▶	70W-100W MH	

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

