



Grandlite®

HIGH POWER LIGHTING SYSTEM

LED High Bay

LED-467



Product Description:

A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heatsink and comes with a hook made of die-cast

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for damp locations

HOUSING

Superior heavy duty die cast aluminum construction

Anodized aluminum reflector

OPTIONS

Optional 347V with adder

Optional clamp band and flat glass with adder

Available Options




Hook




Optional clamp band and flat glass

Line Drawing

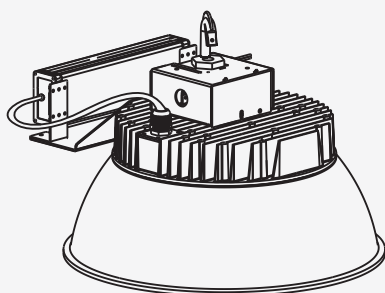

Dimensions

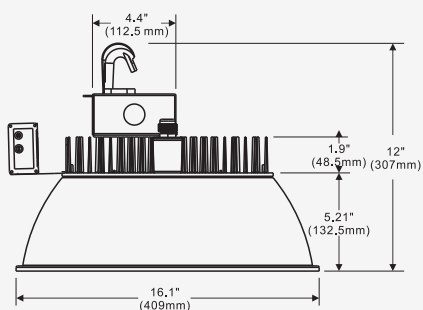

Specification

Model No. ▶	LED-467-L3	LED-467-L5	LED-467-L9
System watts ▶	115	161	215
Lumen Output ▶	13950 lm**	17929 lm**	26433 lm**
Color ▶	5000K		
MA ▶	966MA	780MA	600MA
Input Voltage ▶	120~277V		
CRI ▶	70+		
Starting Temp ▶	-40°C		
Equivalent ▶	250W MH	250W MH	400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

