

Product Description:

Ideal for parks, building, sports field, and other general applications. The lighting fixture is a unique and flexible system, comprised of self-contained modular elements, representing variability in both lumen output and optics capabilities. The lighting fixture can be specified in one-, two-, or three-150-watt module configurations where each module can have one of the three available optical distributions.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum frame

Solid extruded aluminum body

FINISH

UV stabilized power coated finish

OPTIONS

Various light distribution

Various optical lenses available with adder


U-bracket mount

Finish - Bronze. Color option with adder

Specification

Model No.	LED-150-U	LED-300-U	LED-450-U
System watts	150	300	450
Lumen Output	15178 lm**	30114 lm**	45559 lm**
Color	5000K	5000K	5000K
MA	700MA	700MA	700MA
Input Voltage	120~277V	120~277V	120~277V
CRI	70+	70+	70+
Starting Temp	-40	-40	-40
Equivalent	250W MH	400W MH	1000W MH

Dimension:

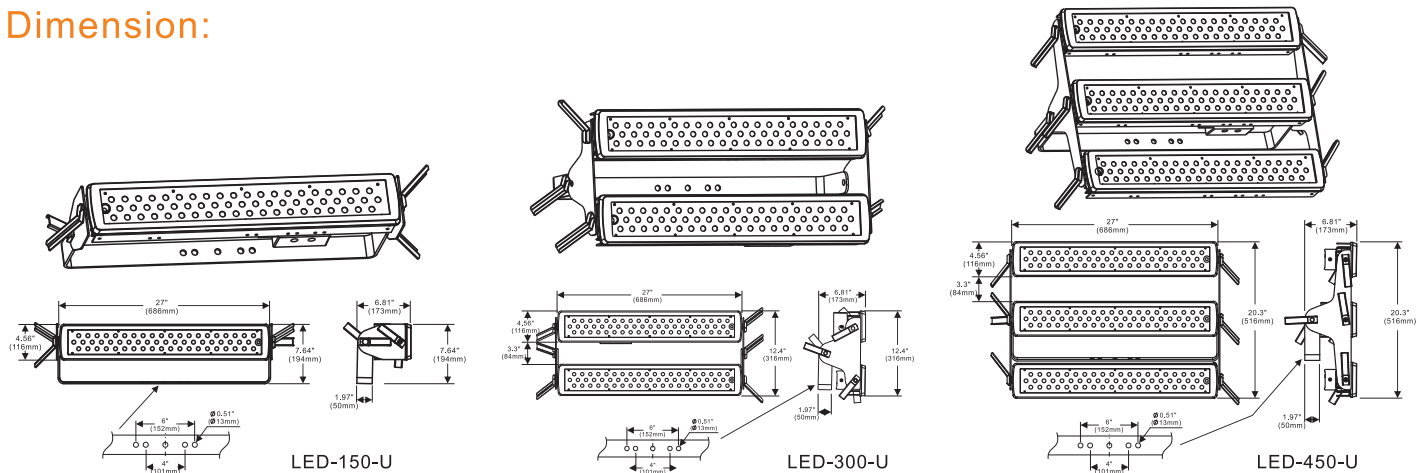

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.