




LED Surface Mount Light


SML-313



Line Drawing

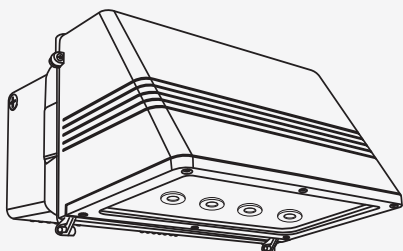

Dimensions

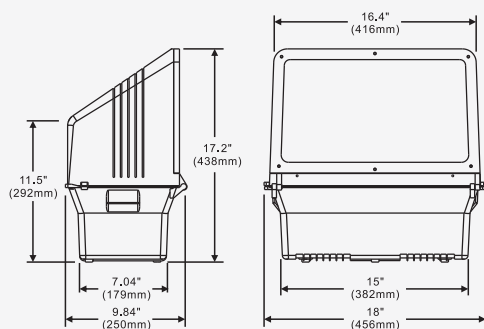

Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 400W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment, It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

LEDS

New generation COB technology

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant tempered glass

OPTIONS

Optional 347V with adder

Dimmable option with adder

Finish - Bronze. Color option with adder

Optional surge protector 10K with adder

Specification

Model No. ▶	SML-313-L4
System watts ▶	122
Lumen Output ▶	16794 lm**
Color ▶	5000K
MA ▶	800 MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.