

# Grandlite® LARGE WRAP LIGHTING

LED-TR4-60P



## APPLICATIONS


	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges



Meets DLC 5.1 Requirements



## Product Description:

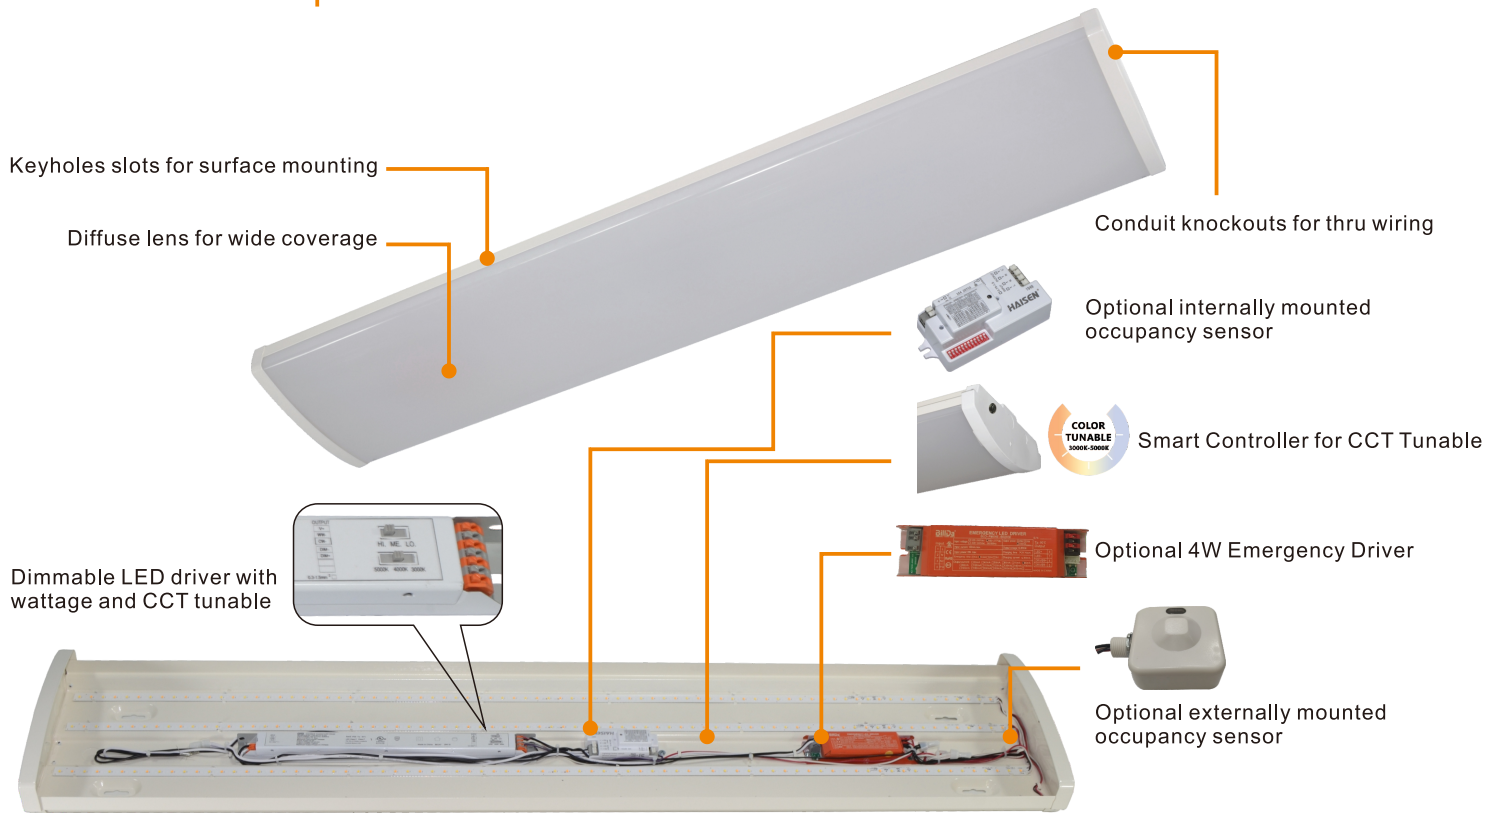

## Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

## Features:

### LISTING

- ▶ UL and CUL listed

### HOUSING

- ▶ Housing made of high quality steel with high reflectance paint, providing high lumen output.

### AMBIENT TEMPERATURE

- ▶ Suitable for use in -40°C to +40°C

### EFFICACY

- ▶ Up to 130 lumens per watt (see individual wattage data)

### CCT AND CRI

- ▶ 3000K, 4000K and 5000K CCT available, 80CRI

### LENS

- ▶ Precision and high reflectance lens producing superior uniformity

### ELECTRICAL

- ▶ Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;
- ▶ 2KV-4KV Surge.
- ▶ Dimming 0-10V driver Standard.
- ▶ Occupancy sensor (PIR) optional.

### FINISHES

- ▶ Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



Scan QR CODE  
for more information



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## Performance Data

Model NO.	System Watts	Lumens*	Efficacy*
LED-TR4-60P	25/39/55W	7170 lm*	129 lm/W*
*Lumen and efficacy are based on highest wattage 5000K			

## Specification:




Example: LED-TR4-P

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-TR4-60P	25W 39W 55W	UNV= 120-277VAC	8=80+	30=3000 K 40= 4000 K 50=5000 K	WH=White	FAO = Tunable Smart Controller  BLANK = No Sensor  OS = External/Internal Occupancy Sensor  EM = Emergency Driver

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## Dimension:

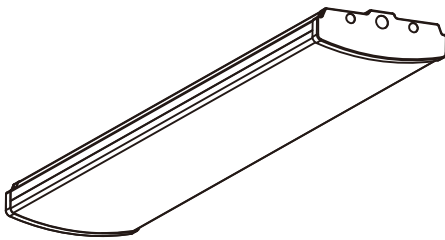

Scan QR CODE  
for more information



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

# LARGE WRAP LIGHTING

---

LED-TR4-60P

**Grandlite**<sup>®</sup>

505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel:(626)839-8868 Fax:(626)581-8099

e-mail: sales@grandlite.com

 [www.grandliteled.com](http://www.grandliteled.com)

