



Grandlite®

HIGH POWER LIGHTING SYSTEM

LED High Bay

LED-467A



Available Options



Hook




Optional clamp band and flat glass




Drop Lens

Line Drawing



Dimensions

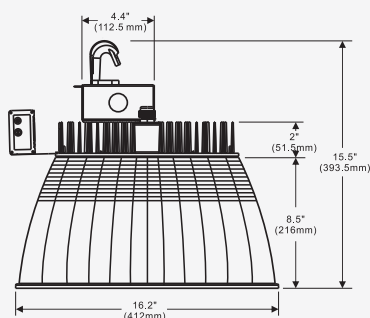

Product Description:

A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heatsink and comes with a hook made of die-cast

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for damp locations

HOUSING

Superior heavy duty die cast aluminum construction

Acrylic reflector

OPTIONS

Optional 347V with adder

Specification

Model No.	LED-467-A L3	LED-467-A L5	LED-467-A L9
System watts	115	161	215
Lumen Output	13950 lm**	17929 lm**	26433 lm**
Color	5000K		
MA	966MA	780MA	600MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	250W MH	250W MH	400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.