




Product Description:

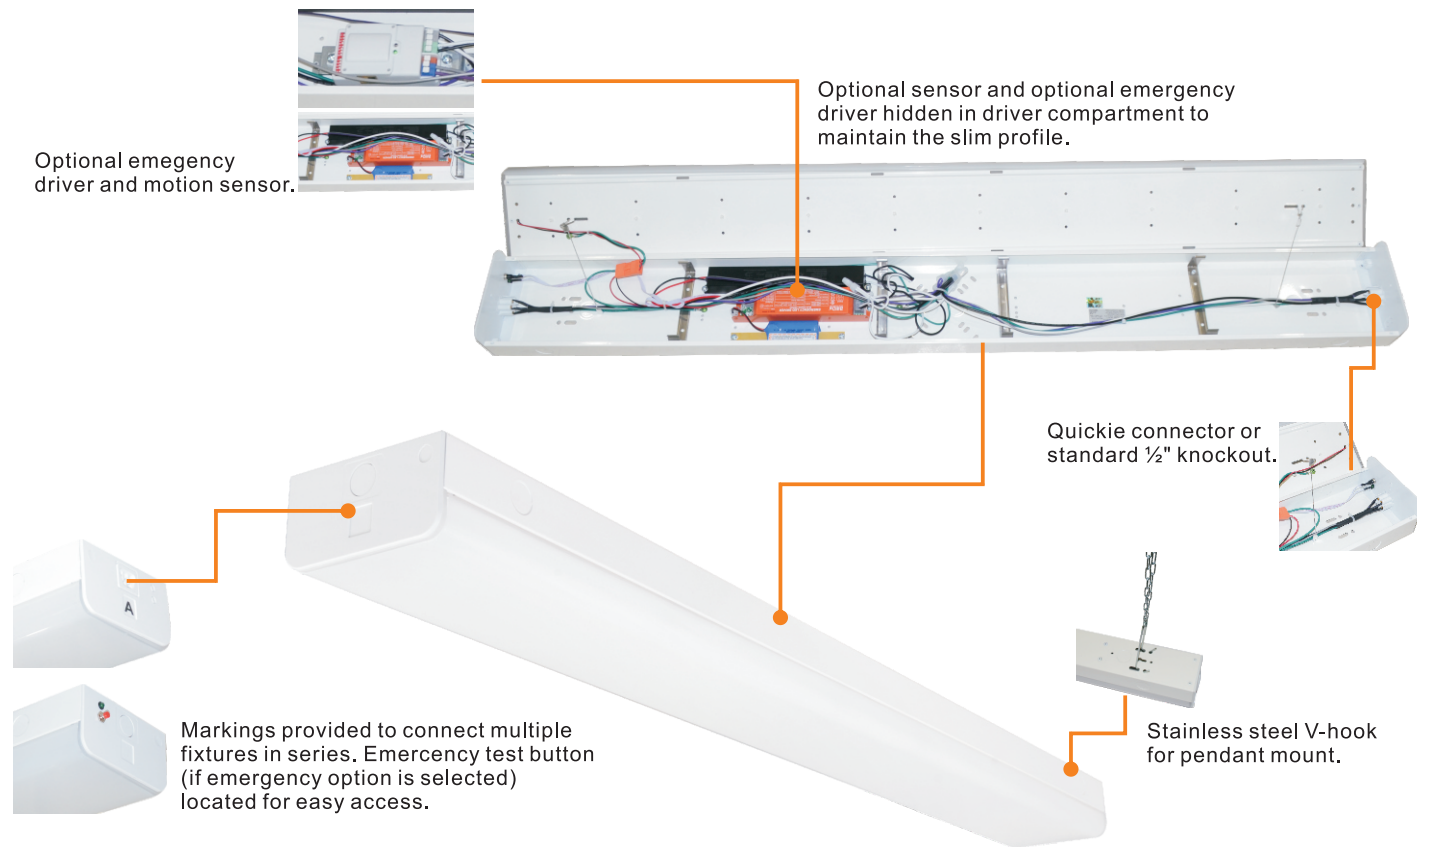

Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, and meeting rooms.

Features:

LISTING

- ▶ UL and CUL listed

HOUSING

- ▶ Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- ▶ Suitable for use in -20°C to +40°C

EFFICACY

- ▶ Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- ▶ 3000K, 3500K, 4000K and 5000K CCT available, 80CRI

LENS

- ▶ Precision and high reflectance lens producing superior uniformity.

ELECTRICAL

- ▶ Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;
- ▶ 2KV Surge protector per ANSI/IEEE C62.412;
- ▶ Dimming 0-10V driver Standard.
- ▶ Occupancy sensor (PIR) optional.

FINISHES

- ▶ Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Additional Mounting Accessories:



Quickie Connector



Quickie Cable

The Quickie connection system uses the latest in toolless technology to easily and seamlessly connect up to 44' of fixtures. The Quickie connector provides a line voltage and 0-10V dimming connection between fixtures. The Quickie cable comes in lengths (18inches) and allows for angled and distant fixture connection. The Quickie sensor integrates with a single fixture or an entire row for occupancy sensing and dimming.

Performance Data

Model NO.	System Watts	Lumens	Lpw	Linkable
LED-SL-L10A	10W	1324	129	Connect up to 28 in fixtures
LED-SL-L20B	19W	2459	132	Connect up to 14 in fixtures
LED-SL-L30B	30W	3835	127	Connect up to 9 in fixtures
LED-SL-L40B	37W	4812	132	Connect up to 7 in fixtures
LED-SL-8F-L40B	38W	4918	132	Connect up to 7 in fixtures
LED-SL-8F-L60B	60W	7670	127	Connect up to 4 in fixtures
LED-SL-8F-L80B	74W	9624	132	Connect up to 3 in fixtures
LED-SL-8040A	38W	4909	127	Connect up to 7 in fixtures
LED-SL-8060B	64W	8314	131	Connect up to 4 in fixtures


Specification:

Example: LED-SL-L10-10UNV8400SWH


Model No.	System Watts	Input Voltage	CRI	Color Temp	Sensor	Finish	Option
LED-SL-L10A	10W	UNV= 120-277VAC	8=80+	30=3000 K	BLANK= No sensor OS= Occupancy Sensor	WH=White	QC= QuickieConnector QW= QuickieCable EM = Emergency Driver
LED-SL-L20B	19W			35=3500 K			
LED-SL-L30B	30W			40= 4000 K			
LED-SL-L40B	37W			50=5000 K			
LED-SL-8F-L40B	38W						
LED-SL-8F-L60B	60W						
LED-SL-8F-L80B	74W						
LED-SL-8040A	38W						
LED-SL-8060B	64W						

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.


Dimension:

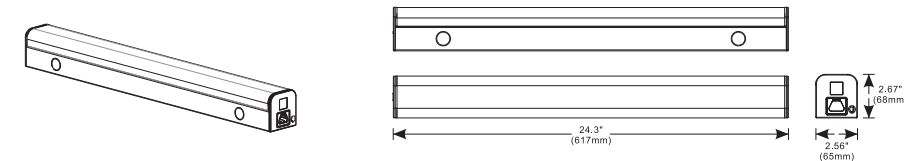

LED-SL-L10

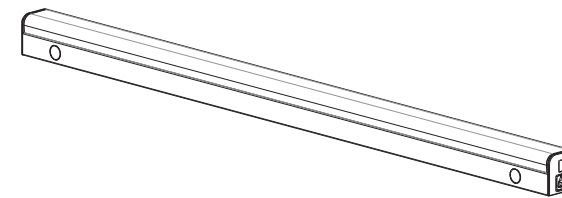


LED-SL-L20 / LED-SL-L30 / LED-SL-L40

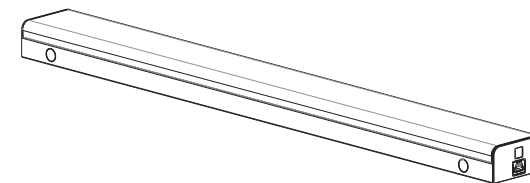


LED-SL-L60 / LED-SL-L80 / LED-SL-L8040 / LED-SL-L8060

Dimension:



Quickie Connector

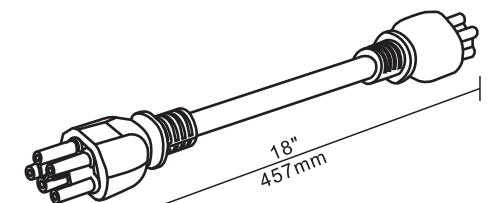

Quickie Cable

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.