



Grandlite®
HIGH POWER LIGHTING SYSTEM



LED-2375/2390-U

LED-2375/2390-SFB

LED-2375/2390-SFS

AVAILABLE OPTIONS



Slip fitter

Brackets

Product Description:

One piece die cast aluminum heatsink provides the most ideal heat dissipation, making the fixture cool to the touch

High performance optics provide maximum lighting solution to your needs



Optional 120V-277V button photocell available

Standard 6 KV surge protection included

IP 65 for both Optical and Electrical chamber

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Grandlite®
HIGH POWER LIGHTING SYSTEM
LED Flood Light
LED-2375/2390

Product Description:

This compact but powerful flood light is a true innovation practically and aesthetically. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. These LED lights have transformed the landscape lighting environment. Utilizing performance optics and long lasting driver, these landscape lights will last for years to come.

Optional Kelvin color* with adder.

Features:

LISTING

►UL and CUL listed for wet locations

HOUSING

►Solid construction die-cast aluminum body

FINISH

►UV stabilized powder coated finish

OPTIONS

►Finish - Bronze. Color options with adder

Performance Data


| Model NO. | System Watts | Beam Angle | Lumens | Lpw | B | U | G |
|-----------|--------------|------------|------------|----------|---|---|---|
| LED-2375 | 69 W | 70×110° | 8579 lm** | 124 lm/W | 3 | 1 | 1 |
| LED-2390 | 92 W | 80×110° | 11603 lm** | 126 lm/W | 3 | 2 | 1 |

Specification:

Example:LED-2375069UNV740-SF

| Model No. | System Watts | Input Voltage | CRI | Color Temp | Option | | Finish | Starting Temp |
|-----------|--------------|---------------|-------|------------|----------------------------------|-------------------------------|-----------|---------------|
| | | | | | Accessories | Mounting | | |
| LED-2375 | 069=69W | UNV=120-277V | 7=70+ | 30=3000 K | XS=10kv Surge PE=Photocontrol | SF=Slip Fitter U=U Bracket | BZ=Bronze | -40°C |
| LED-2390 | 092=92W | | | 40=4000 K | | | | |
| | | | | 50=5000 K | | | | |

Dimension:

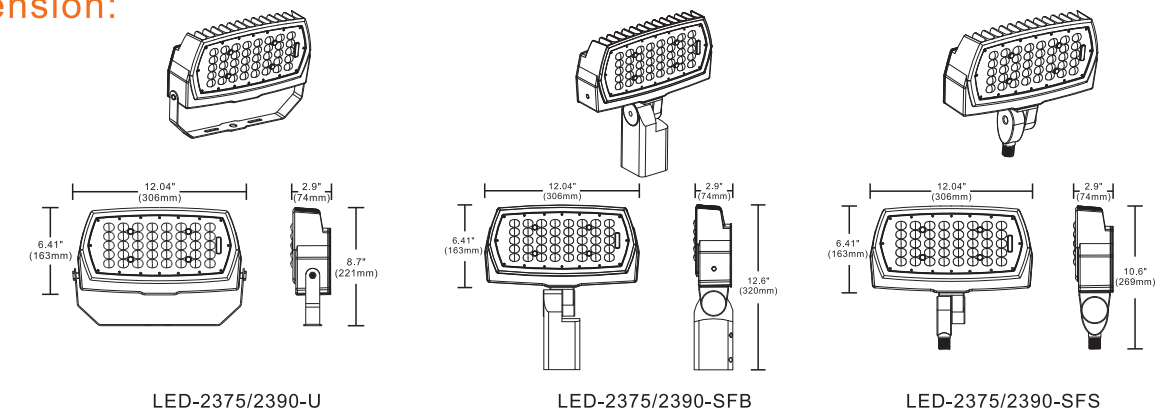

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.