



# LED Area Light/LED Flood Light

## LED-560P-L2



### Product Description:

This powerful luminaire has been designed to meet diversified installation requirements. It can be used as a flood light and an area light. With built-in heatsinks on the back of the luminaire, the LED560 provides truly spectacular light while keeping the LEDs at a cool temperature.

Optional mounting and Kelvin color\* with adder.

### Features:

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Solid construction die-cast aluminum body

#### FINISH

UV stabilized power coated finish

#### LENS

Heat and impact resistant tempered glass

#### OPTIONS

Twist lock photocell with adder

Front hinged cover

Dimmable option with adder

Finish - Bronze. Color option with adder

### Available Options



Slip fitter



Trunnion




Pole mount




Photo control

### Line Drawing



### Dimensions

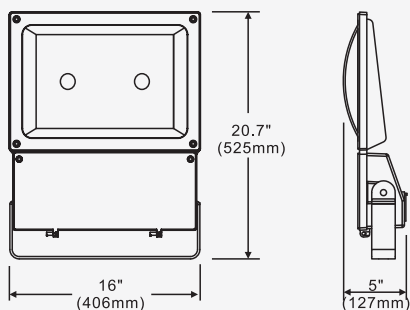

### Specification

Model No. ▶	LED-560P-L2
System watts ▶	77
Lumen Output ▶	8795 lm**
Color ▶	5000 K
MA ▶	950 MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	250W MH

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.