

Model No.
LED-RL-D24



LED-RL-D22



LED-RL-S24



LED-RL-S22



LED-RL-S14



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Built-in L tabs



Easy access J-Box provides friendly and fast installation. The contractor can do the wiring in the J-Box.

Emergency ballast optional

Slim profile design ensures installation for almost every application.

87% Efficient High efficiency lens provides wide coverage and uniformity for your applicaiton



Optional occupancy sensor for energy saving and control

High Power and Efficient LED, making the fixture DLC Premium.

Product Description:

With its slim design, this new Troffer from Grandlite seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs, and with its built-in J-box design, this fixture is very installation friendly. Ideal for office spaces, supermarkets, and meeting rooms.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.





Features:

LISTING

►UL and CUL listed

HOUSING

►Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

►Suitable for use in -40℃ to +50℃

EFFICACY

►Up to 130 lumens per well (see individual wattage data)

CCT AND CRI

►3000K, 3500K, 4000K and 5000K CCT available, 80CRI

OPTICS

►Precision and high reflectance lens producing superior uniformly.

ELECTRICAL

►Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard);50/60Hz;

►2KV Surge protector per ANSI/IEEE C62.412;

►Dimming 0-10V driver Standard.

►Occupancy sensor (PIR) optional.

FINISHES

►Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.

Performance Data

Model NO.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-RL-S22	24 W	Type V	3030 lm**	127 lm/W	2	1	1
	32 W	Type V	4082 lm**	127 lm/W	2	1	1
LED-RL-D22	24 W	Type V	3030 lm**	127 lm/W	2	1	1
	32 W	Type V	4082 lm**	127 lm/W	2	1	1
LED-RL-S24	37 W	Type V	4890 lm**	132 lm/W	3	1	2
	42 W	Type V	5458 lm**	131 lm/W	3	1	2
	59 W	Type V	7646 lm**	129 lm/W	3	1	2
LED-RL-D24	37 W	Type V	4890 lm**	132 lm/W	3	2	2
	42 W	Type V	5458 lm**	131 lm/W	3	2	2
	59 W	Type V	7646 lm**	129 lm/W	3	2	2
LED-RL-S14	32 W	Type V	4082 lm**	127 lm/W	2	1	1
	38 W	Type V	4808 lm**	127 lm/W	2	1	1






* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Specification:

Example:LED-RL-D22A32UNV840OSWH

Model No.	System Watts	Input Voltage	CRI	Color Temp	Sensor	Finish	Option
LED-RL-D22A	24=24W	UNV=120-277VAC	8=80+	30=3000 K	BLANK=No sensor OS=Occupancy Sensor	WH=White	EM=(Emergency Battery Back Up)
LED-RL-S22A	32=32W			35=3500 K			
LED-RL-D24A	37=37W			40= 4000 K			
LED-RL-S24A	42=42W			50=5000 K			
	59=59W						
LED-RL-S14A	32=32W						
	38=38W						

Dimension:

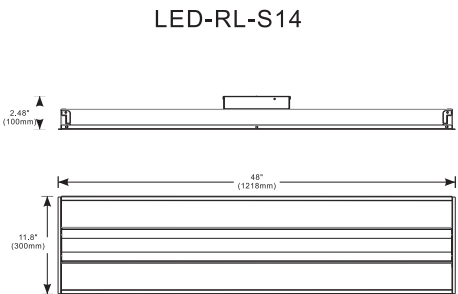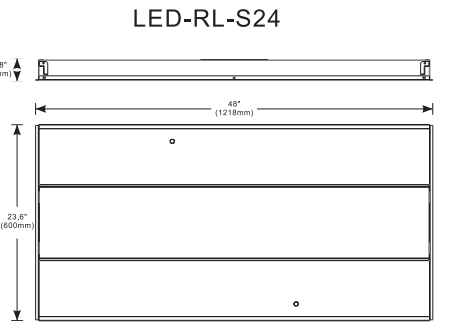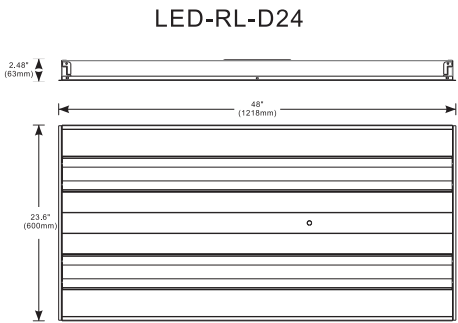

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.