



# LED Surface Mount Light

## LED-357



### Product Description:

This ruggedly designed prismatic wall lighter effectively diffuses and distributes the highly efficient led output to maximize spread and utilization while minimizing wattage consumption. Ideal for energy retro rebates when replacing 70W or lower Metal Halide or HPS.

Optional mounting and Kelvin color\* with adder.

### Features:

#### LISTING

UL and CUL listed for wet locations

#### FINISH

UV stabilized power coated finish

#### LENS

High impact polycarbonate frosted lens

#### OPTIONS

Optional photo control with adder


Finish - Bronze / White

### Available Options




Optional photo control

### Line Drawing



### Dimensions

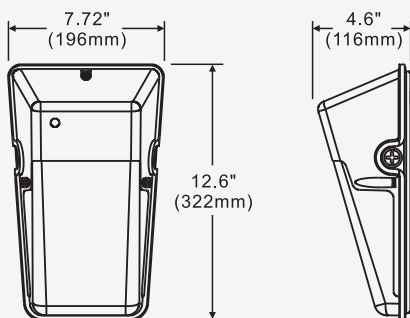

### Specification

Model No. ▶	LED-357	
System watts ▶	20	
Lumen Output ▶	2176 lm**	1667 lm**
Color ▶	5000K	
MA ▶	480 MA	AC LED
Input Voltage ▶	120~277V	120V
CRI ▶	70+	
Starting Temp ▶	-40°C	
Equivalent ▶	50W-70W MH	

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.