



LED Area Light/LED Flood Light

LED-560



Product Description:

This powerful luminaire has been designed to meet diversified installation requirements. It can be used as a flood light and an area light. With built-in heatsinks on the back of the luminaire, the LED560 provides truly spectacular light while keeping the LEDs at a cool temperature.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized power coated finish

LENS

Optional Type III, Type IV, Type VS optics with adder

OPTIONS

Twist lock photocell with adder

Front hinged cover

Dimmable option with adder

Finish - Bronze. Color option with adder

Available Options



Slip fitter



Trunnion




Pole mount




Photo control

Line Drawing



Dimensions

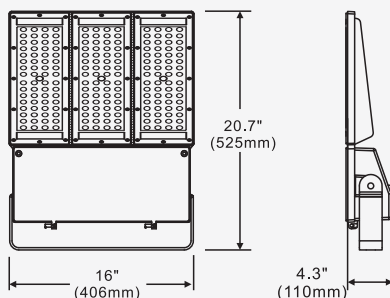

Specification

Model No. ▶	LED-560-L216	LED-560-L432
System watts ▶	152	233
Lumen Output ▶	19143 lm**	29862 lm**
Color ▶	5000 K	
MA ▶	93 MA	
Input Voltage ▶	120~277V	
CRI ▶	70+	
Starting Temp ▶	-40°C	
Equivalent ▶	250~400W MH	1000W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.