



Product Description:


Utilizing the latest generation of LED Chips and patented smart controller, this uniquely designed wall pack not only delivers a similar light output of a 250W metal halide, but it also has multiple wattage and CCT to choose from based on different environment. Housing made out of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.


Available Options



Line Drawing

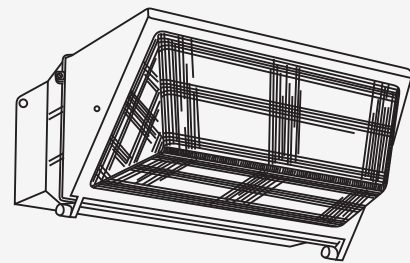

Dimensions

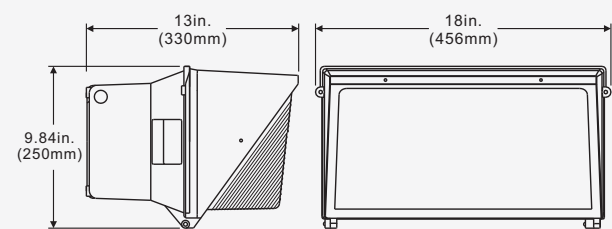

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant borosilicate glass

OPTIONS

Dimmable option with adder

Finish - Bronze. Color option with adder

Optional wire guard / visor with adder

Product Description:



Patented Smart Controller

New smart controller makes it easy to select from a range of wattages and CCTs, making this a truly versatile wallpack.

Optional Photocell

The prismatic borosilicate glass offers optimal light transmission and thermal performance while providing a high quality appeal.

The housing backplate has knockouts for easy installation and wiring to a junction box.

Performance Data

Model NO.	System Watts	Lumens	Lpw
SML-708-CW-135 Standard	135/120/100/80W	17460 lm**	126 lm/w
SML-708-CW-120 Premium	120/103/85/68W	16843 lm**	148 lm/w

** Lumen shows the highest wattage

Specification:

Example: SML-708-CW

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
SML-708-CW-135	0135=135W	UNV=120-277V	7=70+	TX=5000 K	XS= 10kV Surge 2S= 20kV Surge PC = Photocontrol	W =Wall Mount	Bronze	-40°C
SML-708-CW-120	0120=120W			TX=4000 K				
				TX=3000 K				

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.