




Product Description:

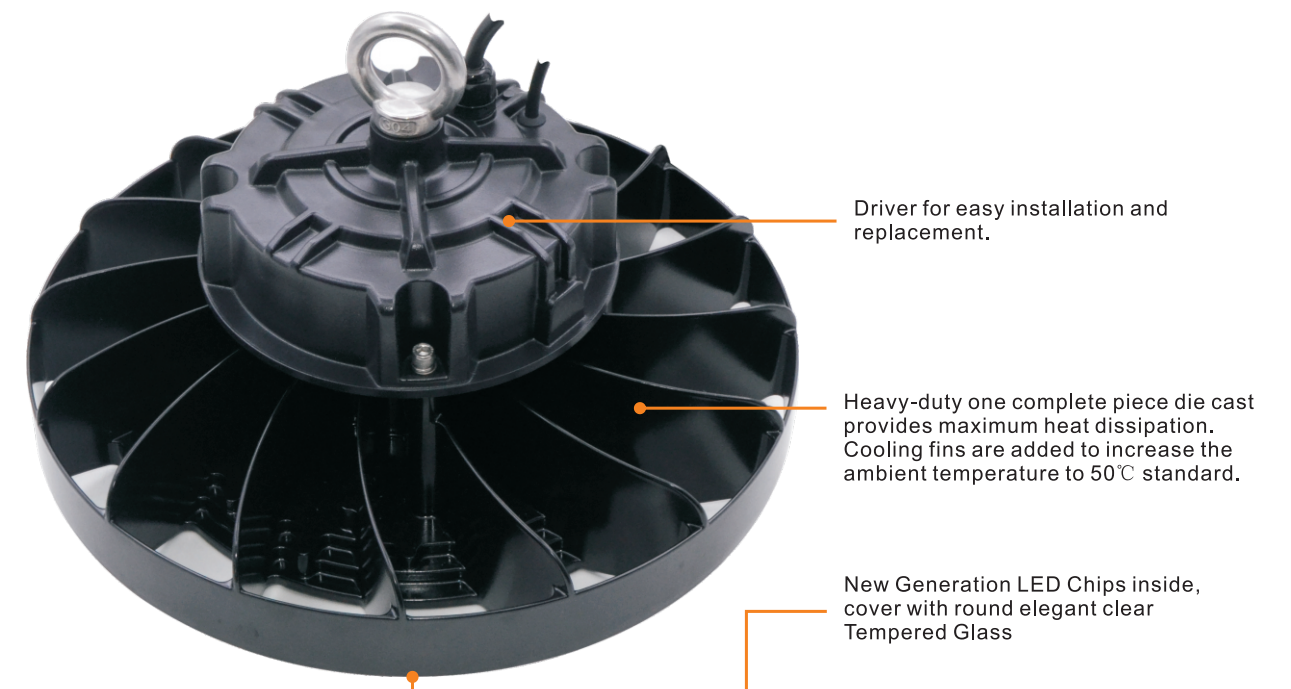

Product Description:

A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heatsink and comes with a hook made of die-cast aluminum for a strong and easy installation.

Features:

LISTING

- UL and CUL listed for damp locations

HOUSING

- Superior heavy duty die cast aluminum construction

OPTIONS

- Optional 347V with adder
- Acrylic reflector, AL reflector

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.





Grandlite®
HIGH POWER LIGHTING SYSTEM
LED High Bay
LED-4623



Grandlite®
HIGH POWER LIGHTING SYSTEM
LED High Bay
LED-4623

Accessories Options 1:

Options available with Aircraft Spun Aluminum Powder painted in White or PMMA reflector.



LED-4623-F



LED-4623-AL



LED-4623-A


Accessories Options 2:




16" Flat Glass And Clamp Band



16" conical Lens And Clamp Band

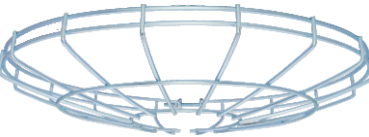

16" Wire Guard

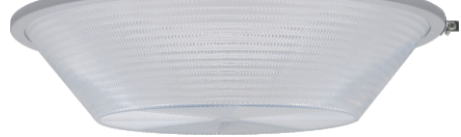

16" conical Lens And Clamp Band

Performance Data

Model No.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-4623-L372	148W	Type VS	19605 lm**	132 lm/W	3	2	1
LED-4623-L564	176W	Type VS	24019 lm**	136 lm/W	3	2	1
LED-4623-L564	232W	Type VS	29983 lm**	129 lm/W	3	2	1



Specification:

Example: LED-4623-L372150UNV740T5-FFCGY



Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories 1	Accessories 1		
LED-4623-L372	148=148W	UNV=120-277V	7=70+	40=4000 K	T5=Type V	F=Flat Glass	FC=16" Flat Glass And Clamp Band	GY=Grey	-40°C
LED-4623-L564	176=176W			50=5000 K		AL=AL Reflector	Y=16" conical Lens And Clamp Band		
	232=232W					A=PMMA Reflector	WG=16" Wire Guard		
							A=16" conical Lens And Clamp Band		

Dimension:

LED-4623-L372

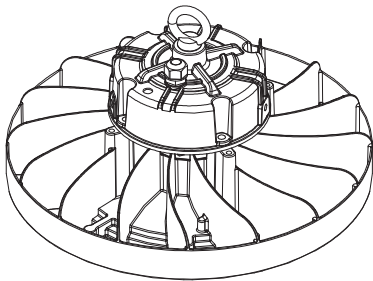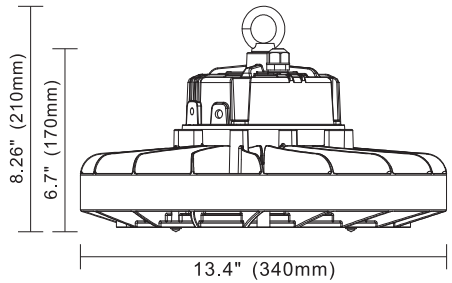

LED-4623-L564

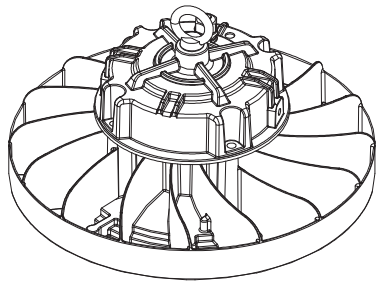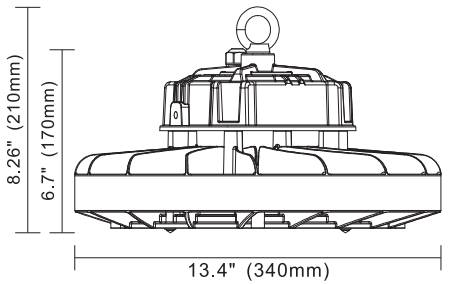

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.