



AVAILABLE OPTIONS



U Bracket



Slip Fitter



Trunnion


APPLICATIONS

	Hotels
	Commercial Buildings
	Schools & Colleges

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Product Description:

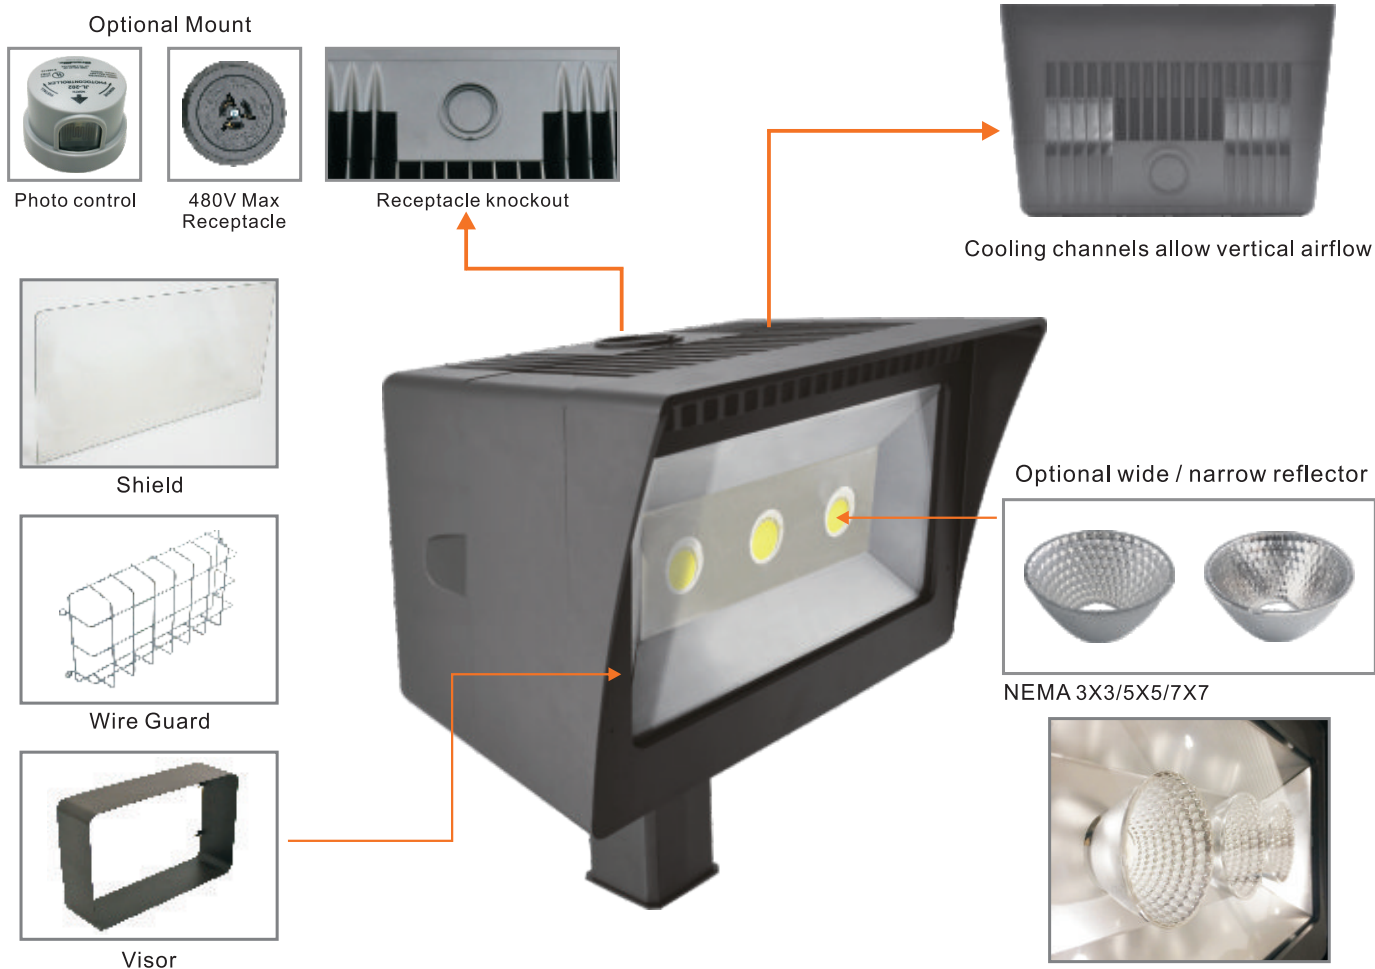

Product Description:

The LED-2060 is a powerful luminaire that has been designed to meet a wide variety of installation locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsinks the fixture can maintain a high lumen output while keeping the LED modules at a cool temperature.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Heavy duty die-cast aluminum powder coating, corrosion resistant hardware

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant tempered glass

OPTIONS

Optional 347V with adder

Optional surge protector 10K with adder

Optional NEMA photo control with adder

Wide / narrow distribution available with adder

Finish - Bronze. Color option with adder

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.



LED-2060-SF



LED-2060-TR






LED-2060-U

Specification:

Example: LED-2060

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option		Finish	Starting Temp
						Accessories	Mounting		
LED-2060	145=145W 197=197W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	N3=NEMA3 N5=NEMA5 N7=NEMA7	XS=10kv Surge PE=Photocontrol 3R=3-pin Receptacle 5R=5-pin Receptacle 7R=7-pin Receptacle	PM=Pole Mount SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C

Dimension:

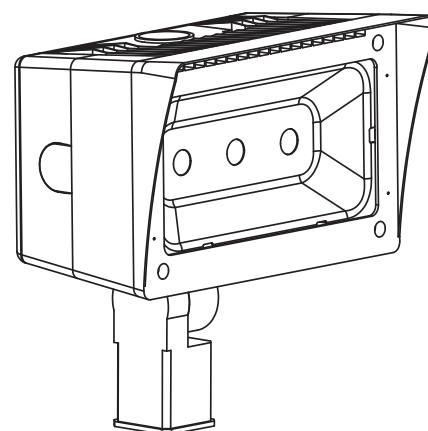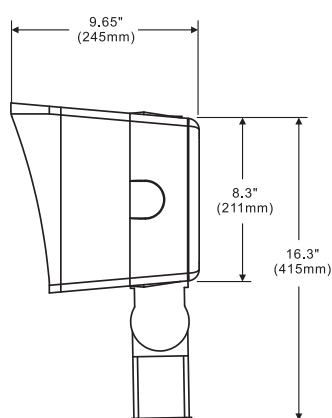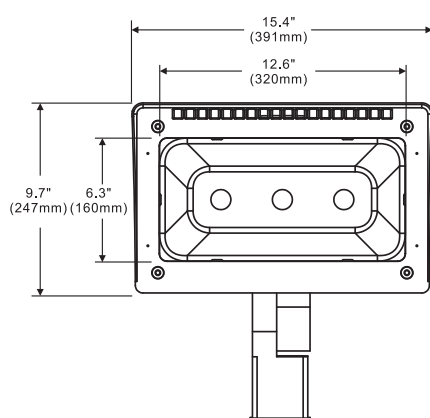

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.