

Product Description:

This powerful luminaire has been designed to meet diversified installation requirements. It can be used as a flood light and an area light. With built in heatsinks on the back of the luminaire, the LED-2810 provides truly spectacular light while keeping the LEDs at a cool temperature.

Optional Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum and extruded aluminum body

LEDS

New generation LED module

FINISH

UV stabilized powder coated finish

LENS

Optional NEMA 3, NEMA 5, NEMA 7 optics with adder


OPTIONS

Optional 347V with adder


Dimmable option with adder

Finish - Bronze. Color option with adder

Line Drawing

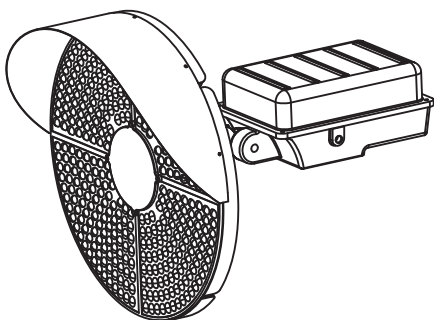

Dimensions

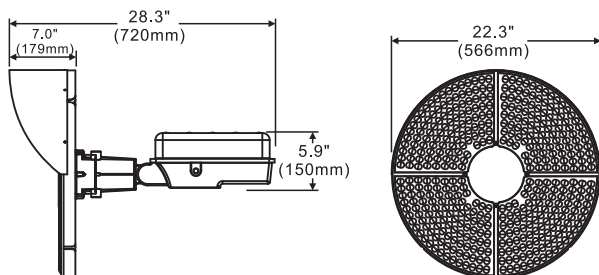

SPECIFICATION

Model No.	LED-2810		
System watts	362W	425W	505W
Lumen Output	54997lm**	64375lm**	76394lm**
Color	5000K		
MA	114MA	117MA	117MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	1500W MH	2000W MH	2X1500W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.