



## Product Description:

Innovative quick-mount system. Fixture mounts to a square or octagonal 4" surface or recessed j-box. Optional pendant-mount installation available.



Precisely controlled light performance provide best in class visual comfort as well as highly efficient efficacy.



Five stage chromate-conversion powder paint manufacturing process provide long life and combat against the elements

\*Optional multi-dimming occupancy sensing reduces energy loss

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## Product Description:

This new LED Garage and Canopy provides the best in class visual comfort for customers while providing great lumens performance and psychometric performance as well. It is a great choice for customers who are looking to change from the traditional HID lights.

## Features:

### LISTING

UL and CUL listed for wet locations

### HOUSING

Superior heavy duty die cast aluminum construction  
aluminum reflector top housing

### OPTIONS

Optional 347V with adder

Optional clamp band and flat glass with adder

## Performance Data


Model NO.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-3601	34W	Type VS	3822 lm**	112 lm/W	2	0	2
	55W	Type VS	6404 lm**	116 lm/W	2	0	2
	71W	Type VS	7941 lm**	111.8 lm/W	2	0	2

## Specification:

Example: LED-3601

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Option	Finish	Starting Temp
LED-3601	34=34W 55=55W 71=71W	UNV=120-277VAC	7=70+	40= 4000 K 50=5000 K	XS=10kv Surge OS=Occupancy Sensor PE=Photocontrol	BZ=Bronze WT=White	-40°C

## Dimension:

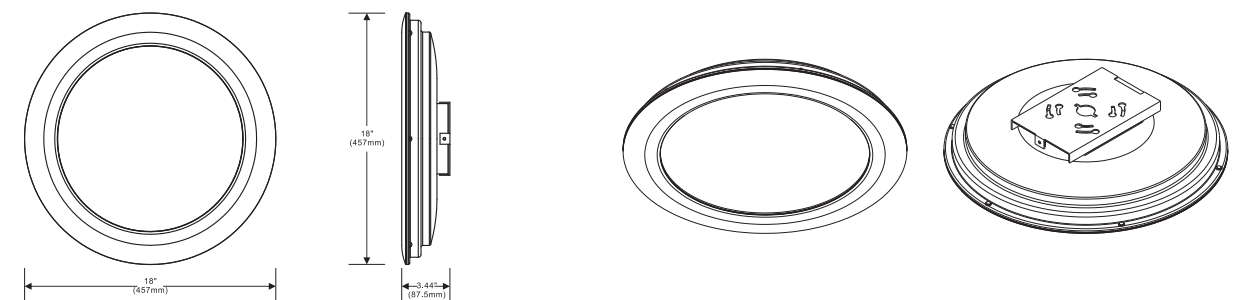

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.