

Grandlite®
HIGH POWER LIGHTING SYSTEM

Flood Light

LED-2315



AVAILABLE OPTIONS



Slip fitter

APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site



2018-04

Product Description:

One piece die cast aluminum heatsink provide the most idea heat dissipation, making the fixture cool to the touch.



Standard 6 KV surge protection included

High performance optics provides maximum lighting solution to your needs



IP 66 for both Optical and Electrical chamber

Product Description:

This compact but powerful flood light is a true innovation combining practicality and aesthetics. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. These LED lights have transformed the landscape lighting environment. Utilizing performance optics and long lasting driver, these landscape lights will last for years to come.

Optional Kelvin color* with adder.

Features:

LISTING

- UL and CUL listed for wet locations

HOUSING

- Solid construction die-cast aluminum body

FINISH

- UV stabilized powder coated finish

OPTIONS

- Finish - Bronze. Color options with adder

Specification:

Example: LED-2315 012UNV740

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Option		Finish	Starting Temp
					Accessories	Mounting		
LED-2315	012=12W	UNV=120-277V	7=70+	30=3000 K 40=4000 K 50=5000 K	PE=Photocontrol	SF=Slip Fitter U=U Bracket	BZ=Bronze	-40°C

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.


** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Performance Data


Model NO.	System Watts	Beam Angle	Lumens	Lpw	B	U	G
LED-2315	12 W	80×120°	1475 lm**	122 lm/W	2	3	2

Dimension:

LED-2315-U

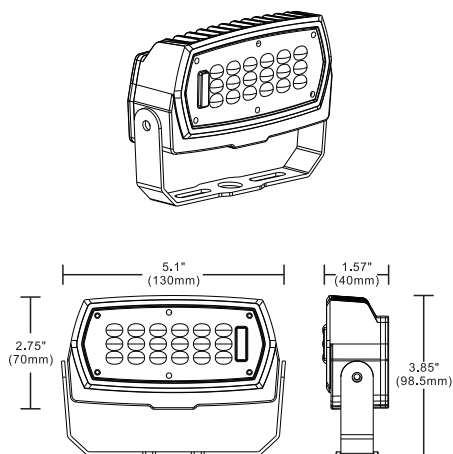

LED-2315-SF

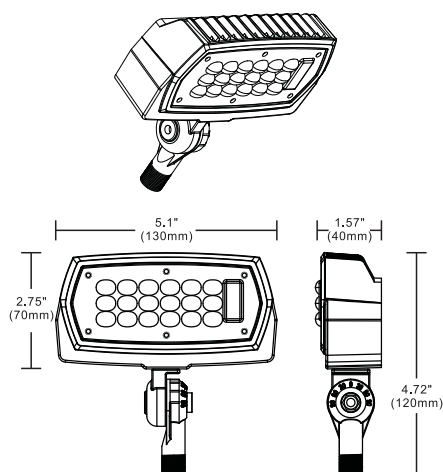



505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com



www.grandliteled.com