



LED SURFACE MOUNT LIGHT

LED-1505

SERIES



Meets DLC 5.1 Requirements

Wattage Selectable

COLOR TUNABLE 3000K-5000K

PRODUCT DESCRIPTION

Solid die-cast aluminum housing

Impact-resistant polycarbonate lens

Optional photocontrol

FAO controller allows the end-user to choose from different CCTs and wattages

Innovative quick mount system for easy mounting and installation

PRODUCT DESCRIPTION

Architectural design with high performance LED light engine, this luminaire performs efficiently and consistently in any given environment. Uniform light distribution is delivered through a frosted diffuser. It is It is ideal for condos, apartments, hotels, porches, and is suitable for indoor and outdoor spaces to replace old-fashioned incandescent “Jelly Jars”.

FEATURES

- LISTING**  
UL and cUL listed for wet locations
- HOUSING**  
Die-cast aluminum body
- LEDS**  
New generation LED technology
- FINISH**  
UV stabilized powder coated finish
- LENS**  
Impact-resistant polycarbonate diffuser
- OPTIONS**  
Optional with adder  
Finish - Bronze. Color option with adder
- Installation**  
Quick mount installation



OPERATING INSTRUCTIONS

**3 WATTAGE SELECTABLE**  
20 / 15 / 10W

**3 CCT SELECTABLE**  
5000K / 4000K / 3000K



PERFORMANCE DATA


Model No.	LED-1505B	LED-1505CL	LED-1505C
Nominal Wattage	20/15/10W	20/15/10W	20/15/10W
Lumens*	2701 lm*	2671 lm*	2607 lm*
Efficacy*	140 lm/W*	136 lm/W*	135 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 5000K			

SPECIFICATION


Example:LED1505BVA020UNV8TXT3ST-XXXXXX

Model No.	LED-1505B	LED-1505CL	LED-1505C
Nominal Wattage	020=20W		
Input Voltage	UNV=120-277VAC		
CRI	8=80+		
Color Temp	TX=3000K / 4000K / 5000K		
Option	PC = Photocontrol		
Finish	BN=Bronze		
Operating Temp	-40°C - +40°C		


DIMENSION

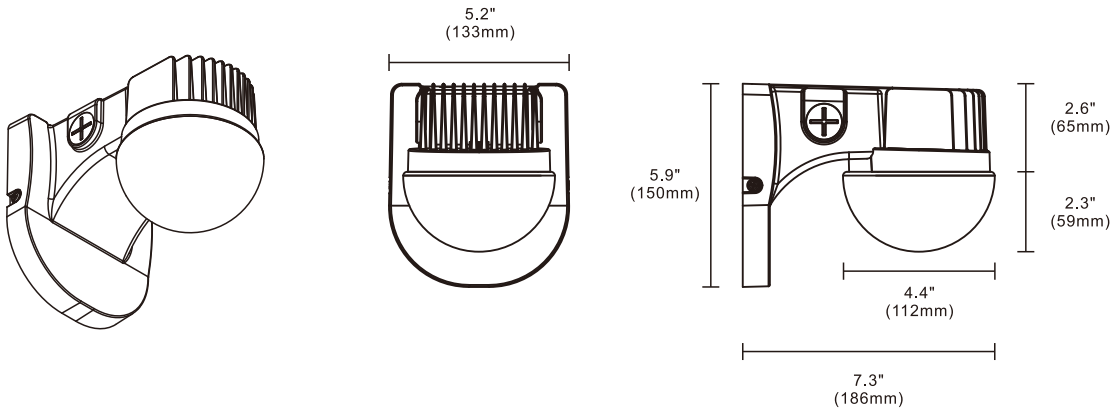

LED-1505B

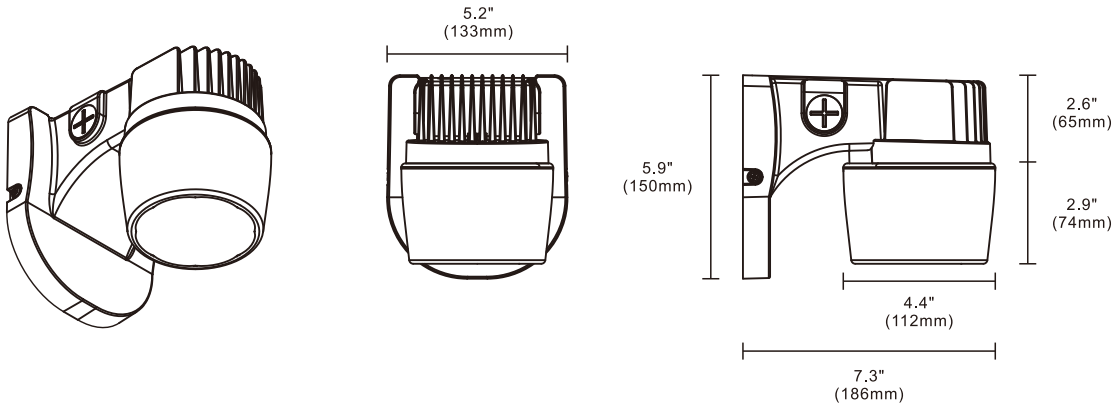

LED-1505CL

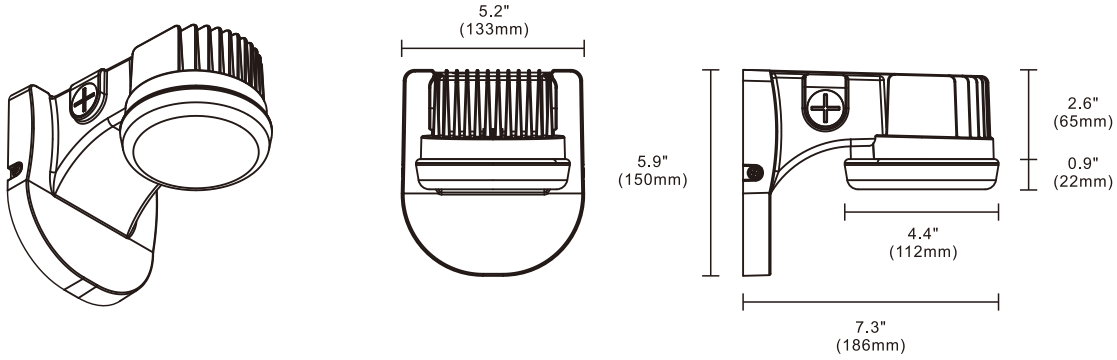

LED-1505C