

Grandlite® LARGE WRAP LIGHTING

LED-TR4-60S




APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges

**Meets DLC
5.1 Standards**



Product Description:

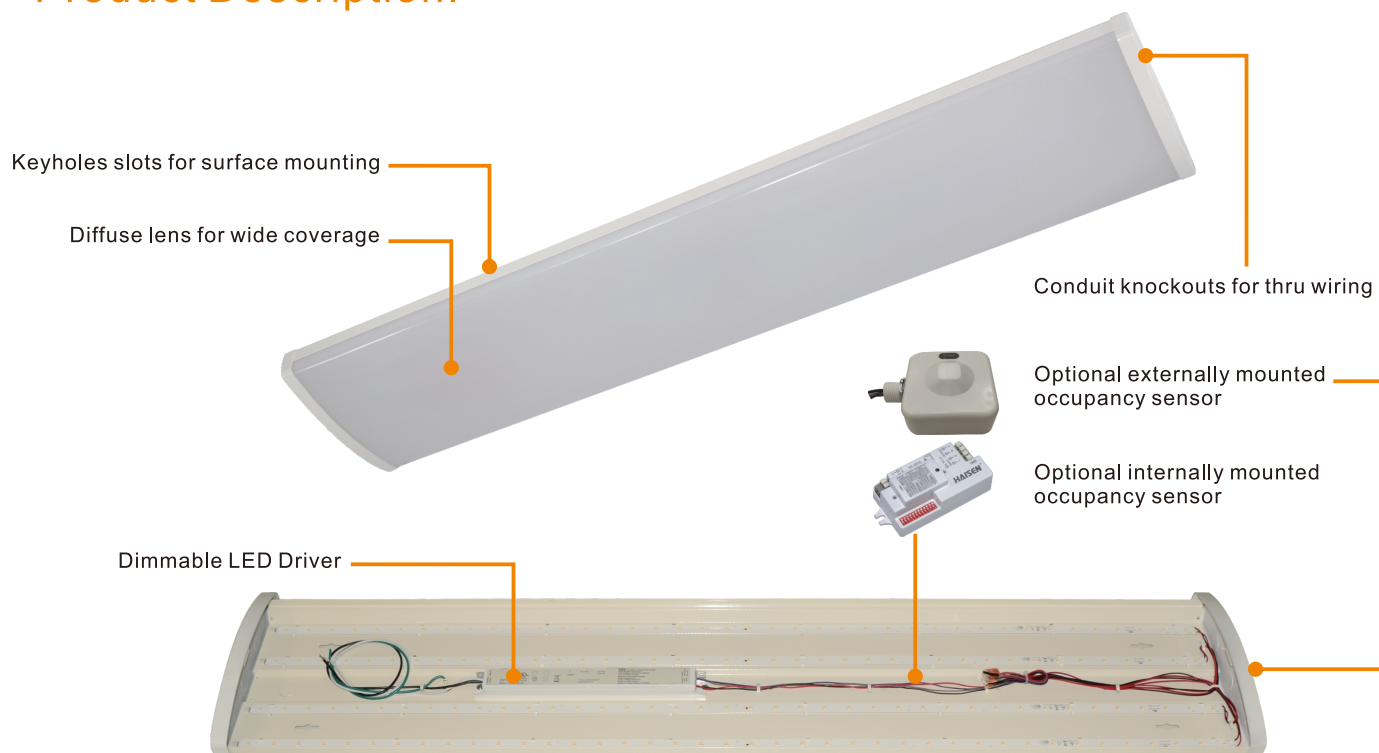

Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

- UL and CUL listed

HOUSING

- Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- Suitable for use in -40°C to +40°C

EFFICACY

- Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- 3000K, 3500K, 4000K and 5000K CCT available, 80CRI

LENS

- Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- Voltage: 120-277V standard, Class 2 constant current

Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard); 50/60Hz;

- 2KV-4KV Surge.

- Dimming 0-10V driver Standard.

- Occupancy sensor (PIR) optional.

FINISHES

- Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Performance Data

Model NO.	System Watts	Lumens*	Efficacy*
LED-TR4-60S	56W	7145 lm*	128 lm/W*
*Lumen and efficacy are based on 5000K			

Specification:




Example: LED-TR4-S

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-TR4-60S	56W	UNV= 120-277VAC	8=80+	40= 4000 K 50=5000 K	WH=White	BLANK = No Sensor OS = External/Internal Occupancy Sensor

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Dimension:

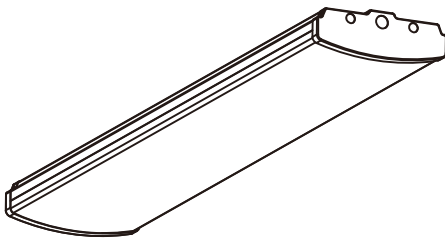

Scan QR CODE
for more information



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

LARGE WRAP LIGHTING

LED-TR4-60S

Grandlite®

505 S. Yorbita Road, City of Industry, CA 91744, USA

Tel: (626) 839-8868 Fax: (626) 581-8099

e-mail: sales@grandlite.com

 www.grandliteled.com

