



Grandlite®

HIGH POWER LIGHTING SYSTEM

LED Dusk to Dawn

LED-712



Grandlite®


HIGH POWER LIGHTING SYSTEM

LED Dusk to Dawn


LED-712



Line Drawing

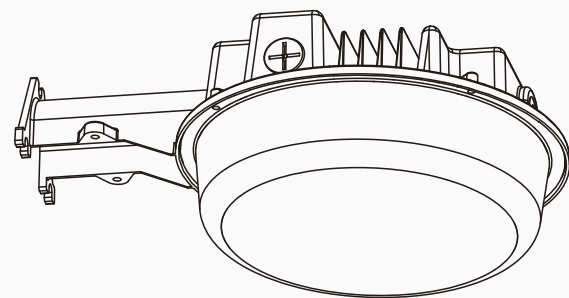

Dimensions

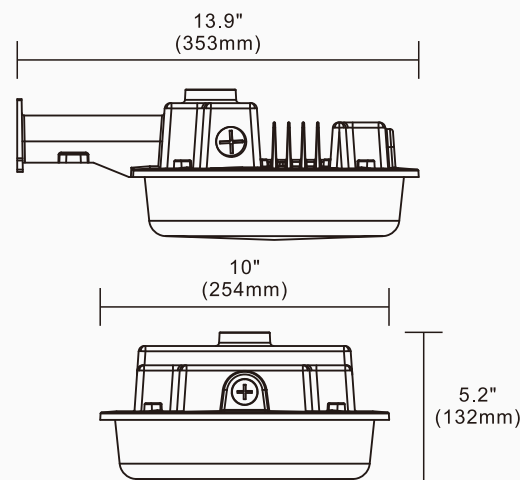

Product Description:

Dusk to dawn fixture of the future is here. Utilizing a single source LED, this dusk to dawn fixture provides prismatic-designed light output for any environment. It is optional to add a NEMA approved photocontrol which used LED that provides significant power savings. Maintaining all the strengths of the traditional dusk to dawn fixtures such as installation brackets and arms while utilizing the latest generation of LEDs, this LED dusk to dawn will last for years to come.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

OPTIONS

Uniform light distribution

Finish - Gray. Color option with adder


Meets DLC 5.1 Requirements



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Product Description:

**UPDATED
SELECTABLES**




Easy access smart controller for adjusting different wattages and CCTs



Optional built-in photocontrol

High quality durable PC lens for maximum light output

Die-cast aluminum heatsink provides the most ideal heat dissipation, making the fixture cool to the touch

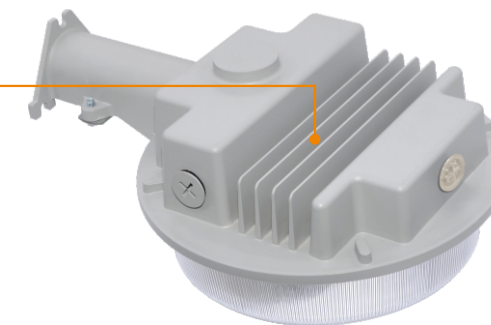

Performance Data:

Model NO.	CCT	Nominal Watts	Lumen*	Efficacy*
LED-712VA	3000K/4000K/5000K	80/60/40W	11012 lm*	149 lm/w*
	3000K/4000K/5000K	60/40/20W	8409 lm*	151 lm/w*

*Lumen and efficacy are based on the highest wattage at 4000K

Specification:

Example: LED-712VA080UNV7TXT5ST-XXXXXX

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp*	Distribution	Optional Accessories	Finish	Mounting
LED-712VA	60=60W 80=80W	UNV=120-277V	7=70+	TX= 30=3000K 40=4000K 50=5000K	T5=Type V	XXXXXX= PC=Optional photocontrol SS=Surge EM=Emergency Driver	GR=Gray	ST=Standard

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.