




Smart controller for wattage tunable
(Exclusive for 70W)

Product Description:

Innovative quick-mount system. Fixture mounts to a square or octagonal 4" surface or recessed j-box. Optional pendant-mount installation available.



Precisely controlled light performance provide best in class visual comfort as well as highly efficient efficacy.

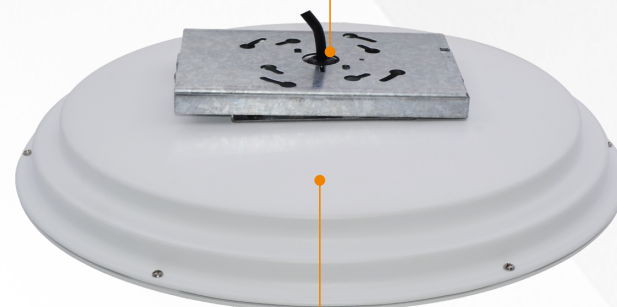

Five stage chromate-conversion powder paint manufacturing process provide long life and combat against the elements

*Optional multi-dimming occupancy sensing reduces energy loss

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Product Description:

This new LED Garage Canopy light provides the best in class visual comfort for customers while providing great lumens performance and psychometric performance as well. It is a great choice for customers who are looking to change from the traditional HID lights.



Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Superior heavy duty die cast aluminum construction
aluminum reflector top housing

OPTIONS

Optional 347V with adder

Optional clamp band and flat glass with adder

Performance Data

Model NO.	System Watts	Dist. Type	Lumens	Efficacy	B	U	G
LED-3601	36W	Type VS	4541 lm**	126 lm/W	2	0	2
	64W	Type VS	7218 lm**	112 lm/W	2	0	2
	71W	Type VS	8446 lm**	118 lm/W	2	0	2
	20/37/53/71W	Type VS	8446 lm**	118 lm/W	2	0	2

**Lumen & Efficacy are based on highest wattage 5000K

Specification:

Example: LED-3601

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Option	Finish	Starting Temp
LED-3601	36=36W 64=64W 71=71W	UNV=120-277VAC	7=70+	40= 4000 K 50=5000 K	XS=10kv Surge OS=Occupancy Sensor PE=Photocontrol FAO=Smart Controller (70W only)	BZ=Bronze WT=White	-40°C

Dimension:



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.