




Meets DLC 5.1
Requirements



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.



Product Description:

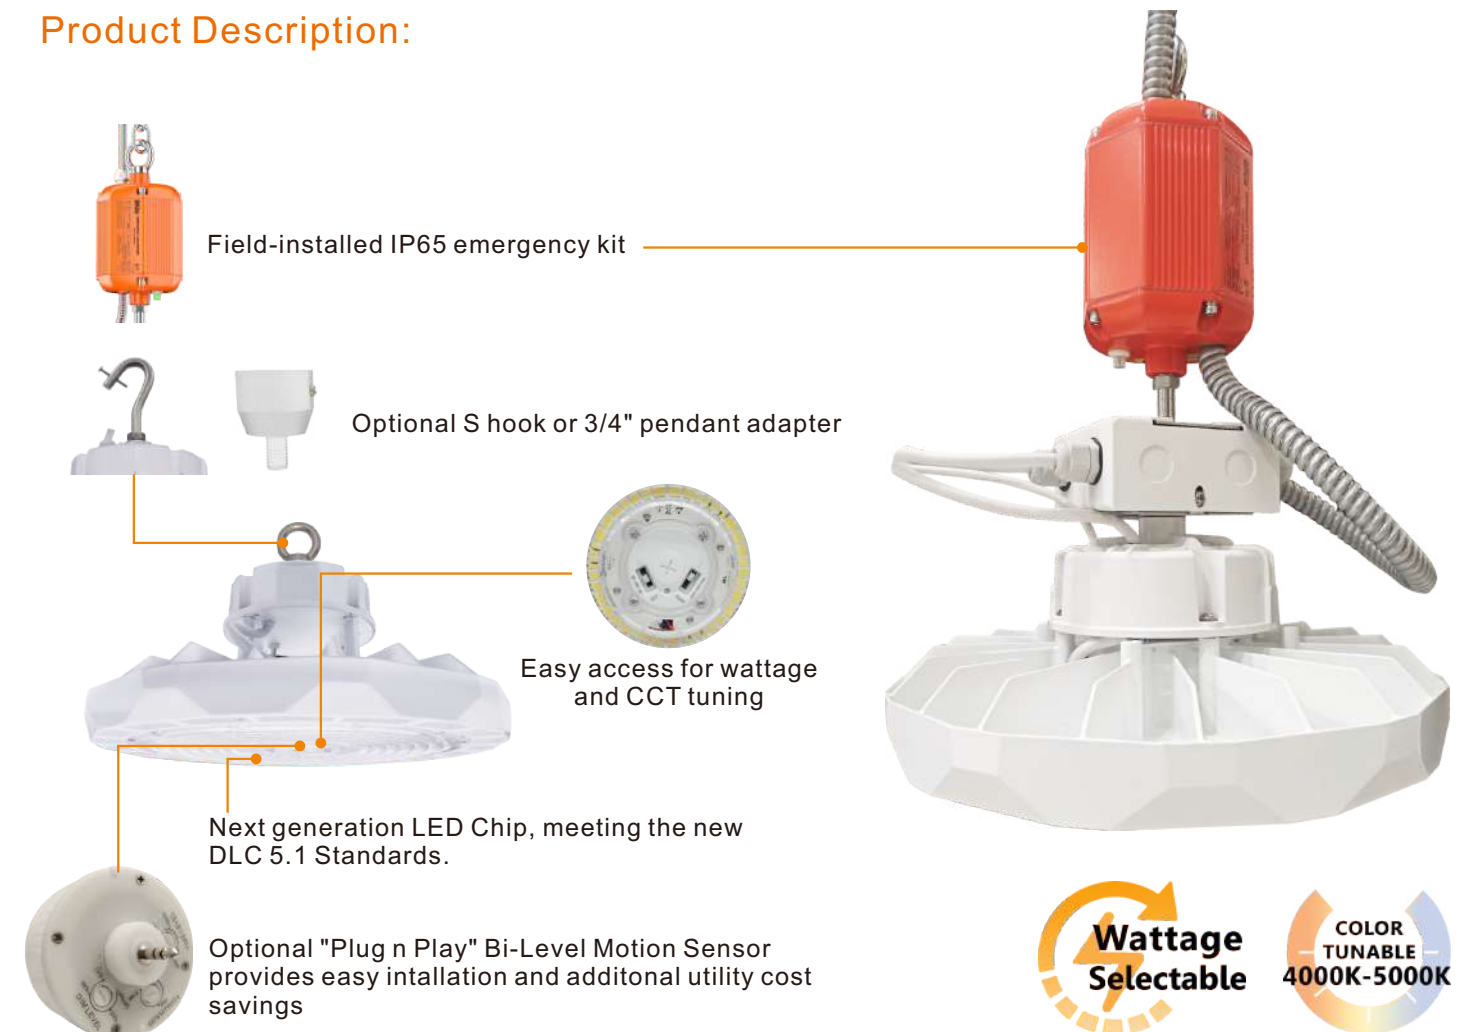

Product Description:

A unique feature is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.

Features:

LISTING

- UL and cUL listed for damp locations

HOUSING

- Superior heavy duty die cast aluminum construction

OPTIONS

- Optional 347VAC with adder
- Acrylic reflector, AL reflector
- 16" Flat glass, Drop lens, Conical drop lens
- 6KV Surge
- 1-10V Dimming

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.





Grandlite®
HIGH POWER LIGHTING SYSTEM
LED High Bay
LED-4650VB/VC



Grandlite®
HIGH POWER LIGHTING SYSTEM
LED High Bay
LED-4650VB/VC

Performance Data:

Model No.	Nominal Wattage	CCT	Lumens*	Efficacy*
LED-4650VB	135/180/240W	4000K / 4500K / 5000K	34264 lm*	140.31 lm/W*
LED-4650VC	135/180/240W	3000K / 4000K / 5000K	33165 lm*	136 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 5000K				

Specification:

Example:LED-4650VB240[UNV,HV4]8TXT5ST-XXXXXX

Model No.	Nominal Wattage	Input Voltage	CRI	Color Temp*	Distribution	Optional Accessories	Finish	Operating Temp
LED-4650VB	240=240W	UNV=120-277VAC HV4=277-480VAC	8=80+	40=4000 K 45=4500 K 50=5000 K	T5=Type V	FC = 16" Flat Glass and Clamp Band A = 16" Drop Lens with Clamp Band Y = 16" Conical Drop Lens with Clamp Band ALW = Aluminum Refractor White ALS = Aluminum Refractor Gloss AC = Acrylic Refractor Clear ACM = Acrylic Refractor Matte WG = 16" Wire Guard OCC = Microwave Occupancy Sensor EM = 30W Emergency Driver	WH=White BK=Black	-40°C - +40°C

Example:LED-4650VC240[HV3,HV4]8TXT5ST-XXXXXX

Model No.	Nominal Watts**	Input Voltage	CRI	Color Temp* (TX)	Distribution	Optional Accessories	Finish	Mounting
LED-4650VC	240=240W	HV3 = 120-347VAC HV4 = 277-480VAC	8=80+	30=3000 K 40=4000 K 50=5000 K	T5=Type V	OCC = Microwave Occupancy Sensor EM = 30W Emergency Driver PC = Daylight Sensor	WH=White BK=Black	ST = Standard / Default

Accessories:




LED-4650-FC LED-4650-ALW LED-4650-ALS LED-4650-AC LED-4650-ACM



16" Flat Glass And Clamp Band 16" Wire Guard 16" Conical Drop and Clamp Band 16" Drop Lens and Clamp Band

Dimension:

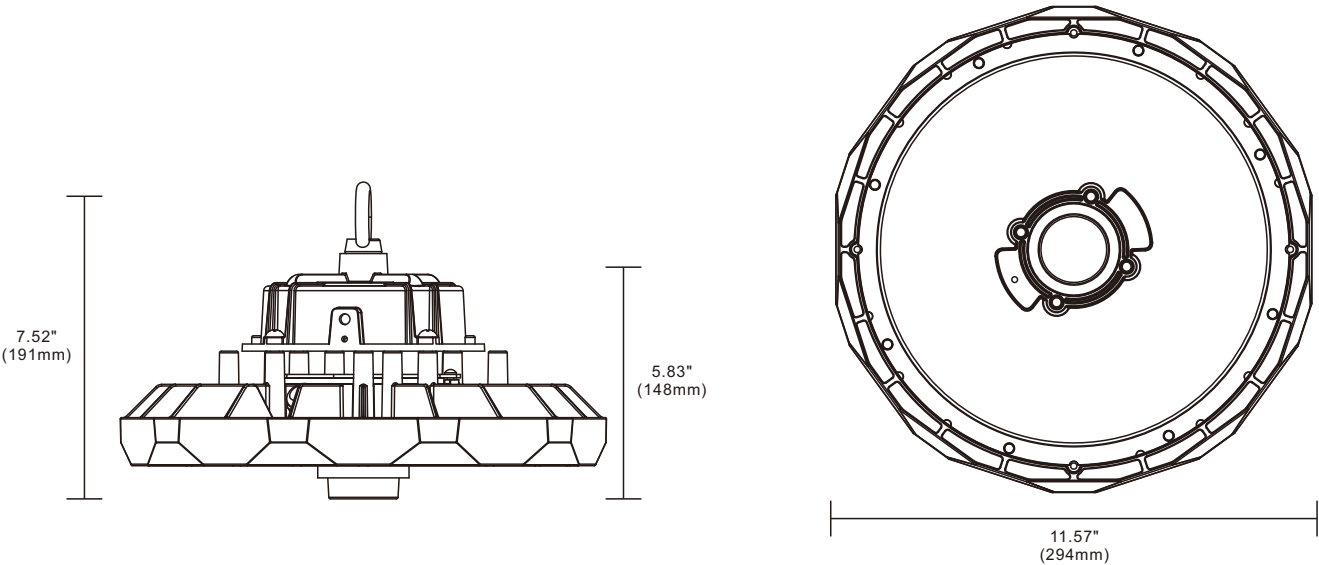

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

