




GRPL-10A-C

GRPL-10A-S

Meets DLC 5.1 Requirements

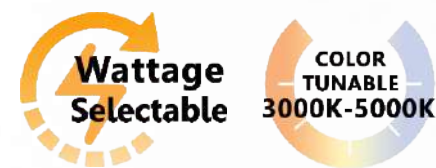

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



**Product Description:**

Extruded aluminum tube provides strength and durability as well as protects and conceals the component wiring

Terminal block provided on base bracket for easy installation of incoming supply wires

Quick disconnect located near the terminal block for simple connection to the LED driver.

Versatile mounting plate allows for easy installation and replacement for any project or development



LED compartment is airtight to prevent fogging and condensation build up and keep water out

Aluminum reflector designed to reduce glare and produce an even distribution

Clear UV resistant polycarbonate lens allows for optimal light transmission and protects the light engine compartment from harsh environments

Driver is mounted under the LED compartment for easy replacement and to protect from water that may accumulate in the base of the bollard. Torx security screws secure the LED compartment to the base to deter vandalism



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.





### Product Description:

This attractive and newly redesigned heavy-duty bollard features a full proof aluminum constructed housing. It provides corrosion and vandal resistance that is not only ideal for lighting pedestrian walkways, but also for accenting the exterior ground of office and apartment buildings, hotels and parks. A solid foundation withstands the element and driver even in the worst weather conditions. The upgraded color tuning switch allows easy access to a range of CCTs based on different environments.

### Features:

- LISTING**  
UL and CUL listed for wet locations
- HOUSING**  
Consisting of an extruded aluminium alloy body  
Standard 4kV Surge
- FINISH**  
UV stabilized powder coated finish
- LENS**  
High-impact polycarbonate diffuser
- OPTIONS**  
Anodized aluminum reflector  
Finish - Bronze  
Build in color adjustable control ranging from 3000K to 5000K

### Performance Data:

Model NO.	Nominal Watts	Lumen*	Efficacy*	Dist. Type
GRPL-10A-C/S	20 / 28 / 37W	4818 lm*	132.38 lm/w*	Type V



\*Lumen and efficacy are based on 5000K highest wattage

### Specification:

Example: GRPL-10A-C / GRPL-10A-S

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp	Finish	Starting Temp
GRPL-10A-C	037=37W	HV3=120-347V	8=80+	TX=3000K 4000K 5000K	BN=Bronze	-40°C
GRPL-10A-S						

### Dimension:

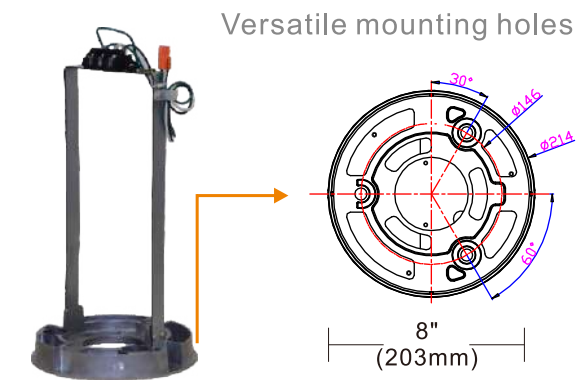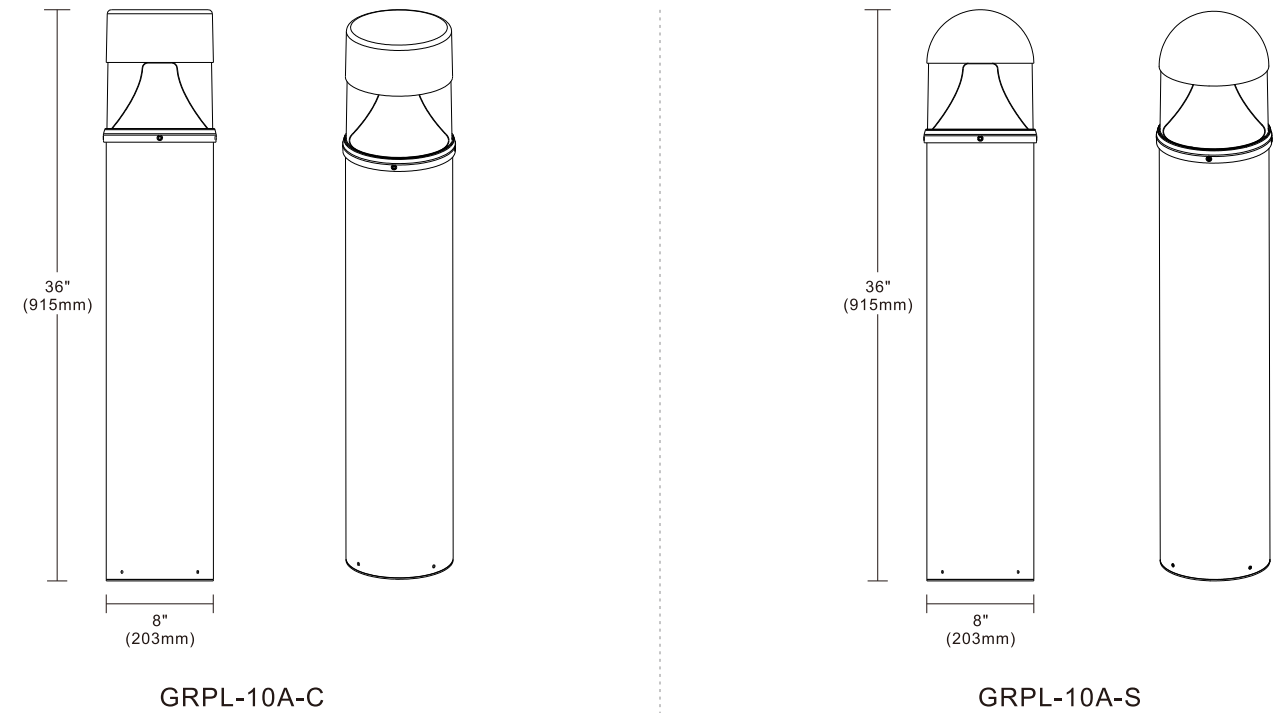

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.