



## LINEAR LIGHTING

LED-VL2/LED-VL4



Meets DLC5.1  
Requirements



### Product Description:




Continuous poured gasket along with 6-8 acetal plastic latches to ensure a tight waterproof seal.

Die-cast conduit plugs.

Diffuse PC lens to provide efficient distribution of light.



Straps to prevent light engine from falling once installed.



Quick release screws for easy install



Optional internally mounted occupancy sensor



Optional 8W Emergency Driver



CCT Tunable for LED-VL2



LED-VL4 with wattage and CCT tunable



Scan QR CODE for more information



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to  $\pm 10\%$ .

## Product Description:

The LED-VL is a linear vapor tight product designed to minimize cost while providing a fixture that is easy to install with high quality, performance, and is suitable where protection from dust and moisture are required.

## Features:

### LISTING

UL and CUL listed for wet locations

### FINISH

UV stabilized power coated finish

### LENS

High impact polycarbonate frosted lens

### OPTIONS

Optional photo control with adder

Finish - Bronze / White

## Performance Data

Model NO.	Nominal Watts**	Lumens**	Efficacy**
LED-VL2	23W	3423 lm*	154 lm/W*
LED-VL4	17W/26W/34W	5323 lm*	153 lm/W*
	26W/39W/54W	8175 lm*	155 lm/W*
	30W/45W/58W	8920 lm*	158 lm/W*
*Lumen and efficacy are based on highest wattage 5000K			

## Specification:

Example: LED-VL-2FT/LED-VL-4FT

Model No.	Nominal Watts**	Input Voltage	CRI	Color Temp	Sensor	Finish	Option
LED-VL2	23W	UNV= 120-277VAC	7=70+	30=3000 K	BLANK=No sensor	WH=White	EM = Emergency Driver  C = Conduit
LED-VL4	17W/26W/34W			40= 4000 K	OS=Occupancy Sensor		
	26W/39W/54W			50=5000 K	CFAO = CCT Tunable Controller		
	30W/45W/58W						



Scan QR CODE  
for more information




\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.


\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

### Dimension:

LED-VL2

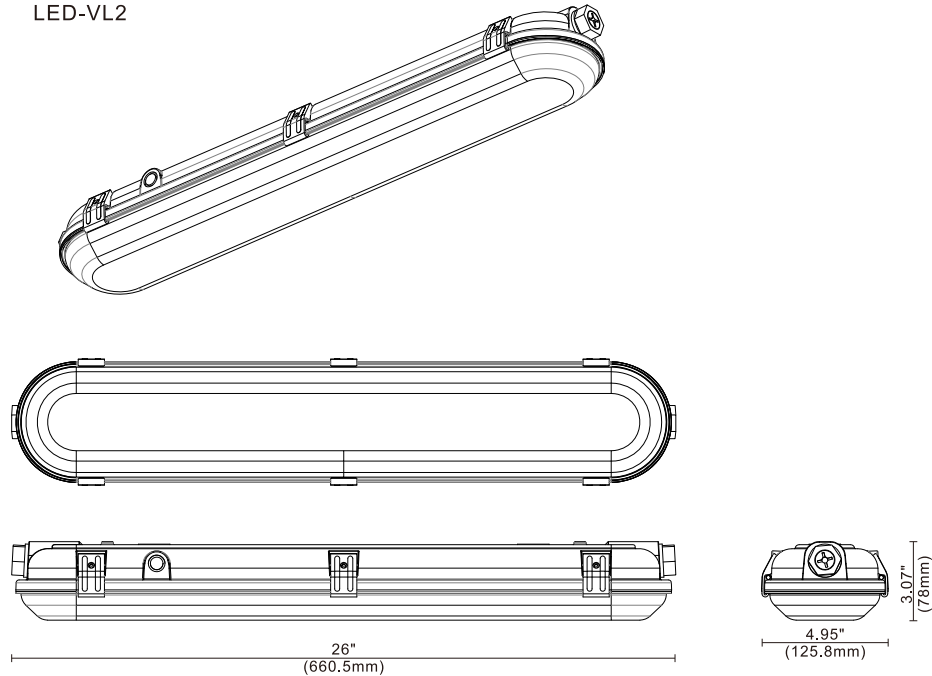

LED-VL4

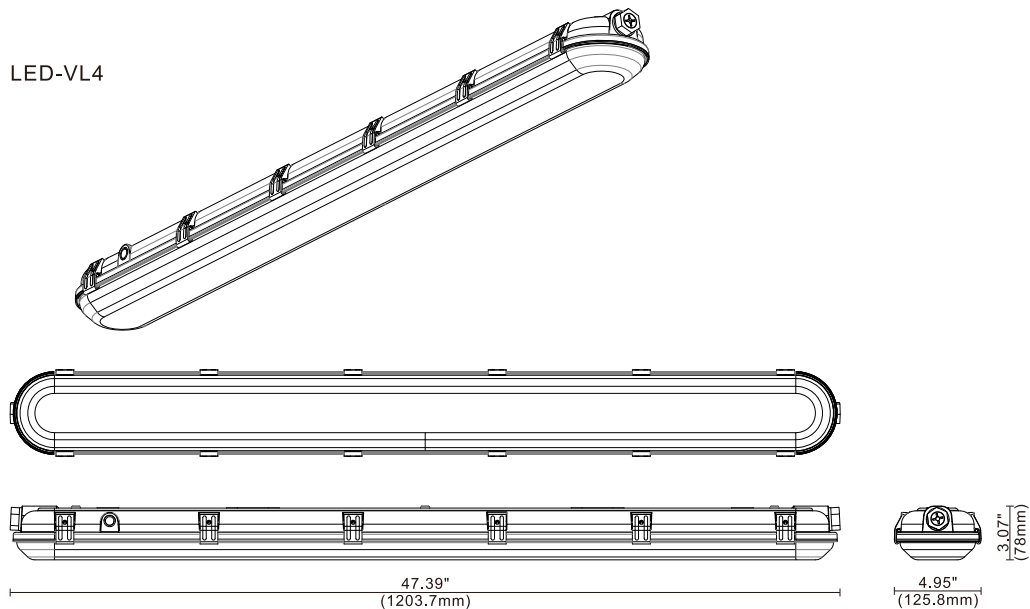

505 S. Yorbita Road, City of Industry, CA 91744, USA  
Tel: (626) 839-8868 Fax: (626) 581-8099  
e-mail: [sales@grandlite.com](mailto:sales@grandlite.com)

[www.grandliteled.com](http://www.grandliteled.com)



Scan QR CODE  
for more information