





Meets DLC 5.1
Requirements



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

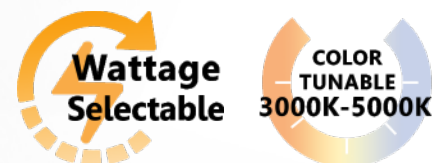

Product Description:

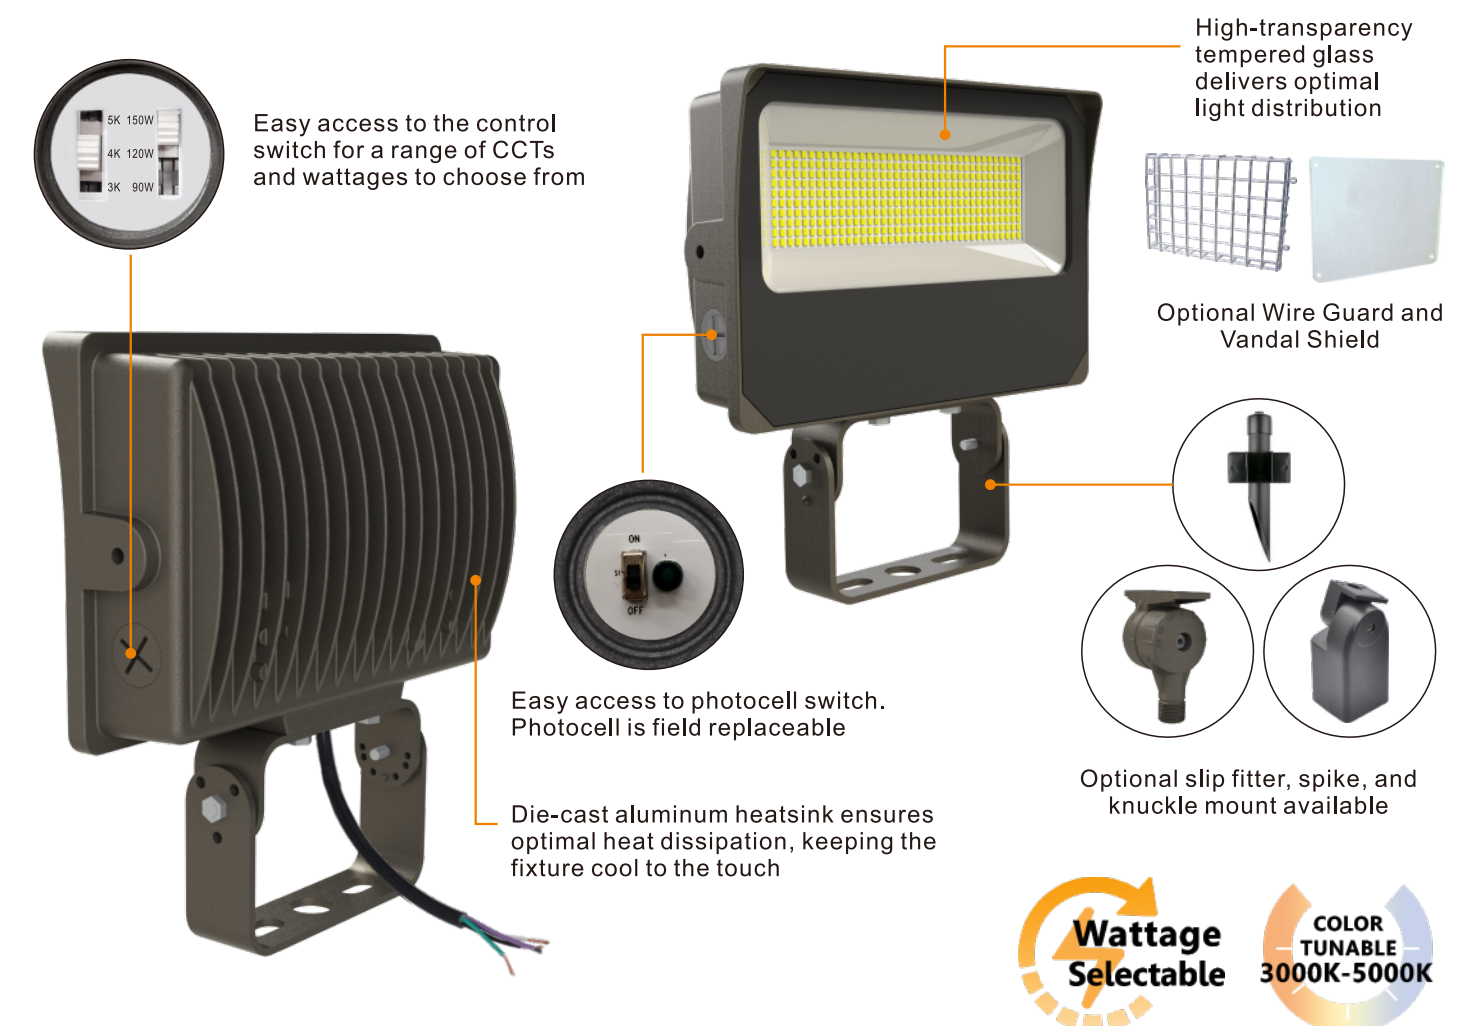

Product Description:

This compact yet powerful flood light combines practical innovation with modern aesthetics. An upgraded tuning switch offers easy access to a range of CCT and wattage settings, adaptable to various environments. With high-performance optics and a durable, long-lasting driver, these landscape flood lights are built to provide reliable illumination for years to come.

Features:

LISTING

- UL and cUL listed for wet locations

HOUSING

- Solid construction die-cast aluminum body

FINISH

- UV stabilized powder coated finish

OPTIONS

- Optional photocell
- Finish - Bronze. Color options with adder

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.





Grandlite®
HIGH POWER LIGHTING SYSTEM
LED Flood Light
LED-29XX



Grandlite®
HIGH POWER LIGHTING SYSTEM
LED Flood Light
LED-29XX

Performance Data:


Model No.	Nominal Wattage	Lumens*	Efficacy*
LED-29035	30/20/10W	4796.11 lm*	142.28 lm/W*
LED-29090	90/70/50W	11895.85 lm*	141.45 lm/W*
LED-29150	150/120/105W	20792.8 lm*	142.33 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 4000K			

Specification:


Example:LED-29035V035UNV8TXN7ST-XXXXXX

Model No.	Nominal Wattage	Input Voltage	CRI	Color Temp	Mounting	Finish	Option
LED-29035	30W	UNV= 120-277VAC	8=80+	30=3000 K	SF=Slip Fitter	WH=White	BLANK = No Sensor
LED-29090	90W			40= 4000 K	SFS=Knuckle	BN=Bronze	PC = Photocell
LED-29150	150W			50=5000 K	TR=Trunnion		S = Spike Mount
					S=Spike Mount		

Dimension:

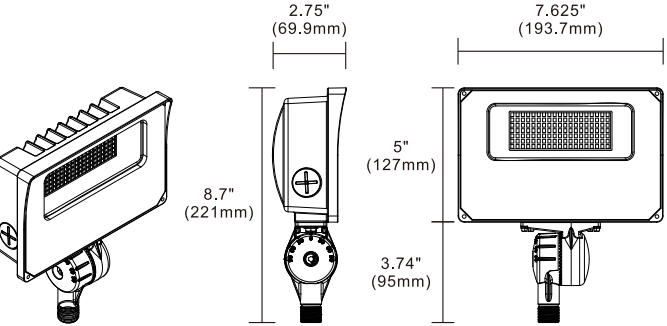


LED-29035-SFS

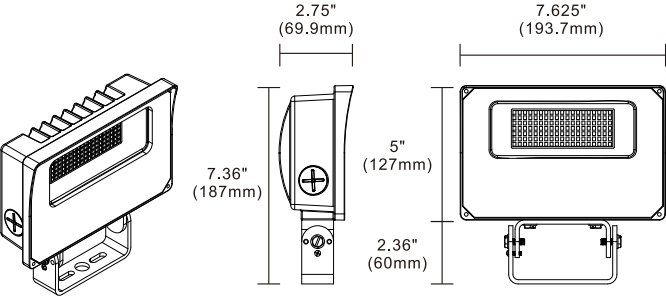


LED-29035-TR


Dimension:

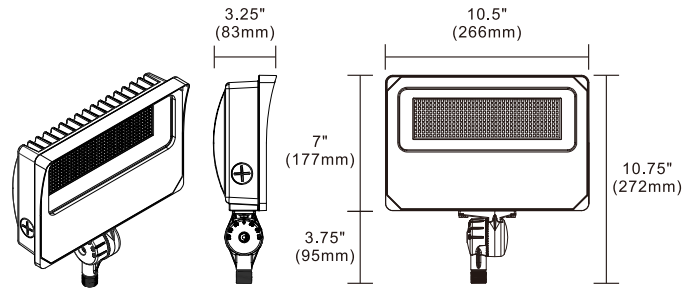


LED-29090-SFS

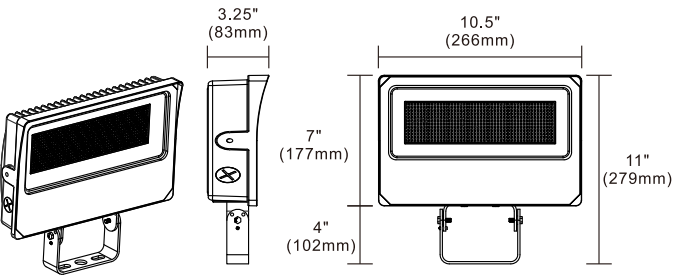

LED-29090-TR



LED-29150-SF



LED-29150-TR

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

