

Grandlite®
HIGH POWER LIGHTING SYSTEM

**BEAM ANGLE
ADJUSTABLE**



LED FLOOD LIGHT **LED-29350**

www.grandliteled.com | 505 S. Yorbita Road, City of Industry, CA 91744, USA
Tel:(626)839-8868 | Fax:(626)581-8099 | e-mail:sales@grandlite.com



PRODUCT DESCRIPTION


Easy access to the control switch for a range of CCTs, beam angles and wattages to choose from



Solid construction die-cast aluminum body



Specifically designed lens for freedom of layout design without any restraint. These optics are engineered for maximum light output

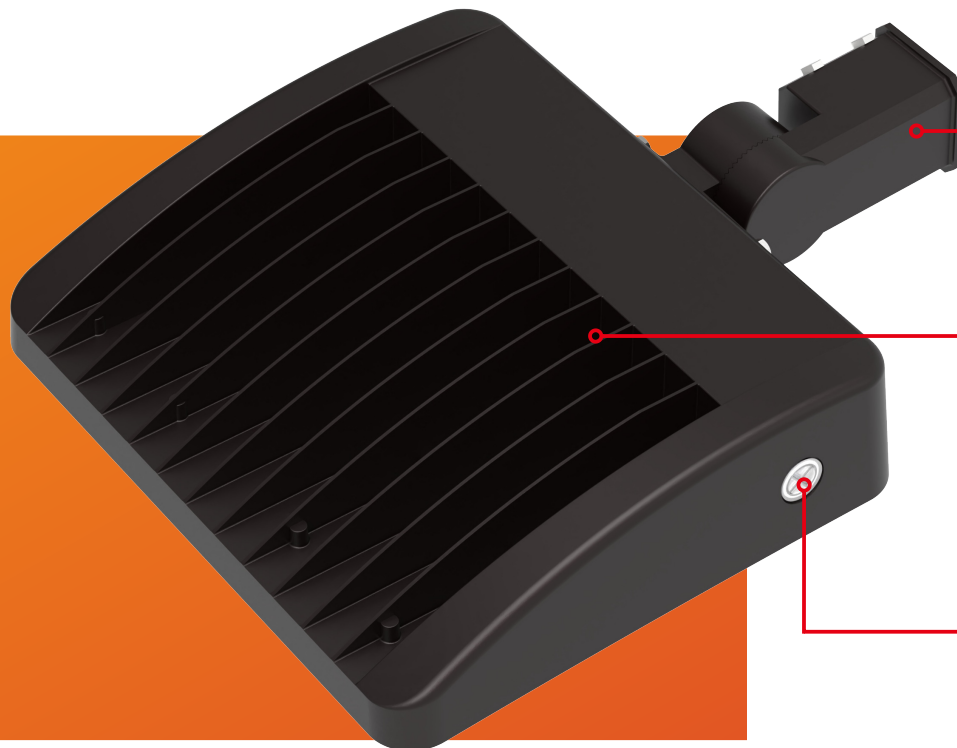


Optional slip fitter and trunnion mount available



Die-cast aluminum heatsink ensures optimal heat dissipation, keeping the fixture cool to the touch

Optional photocontrol with on/off switch



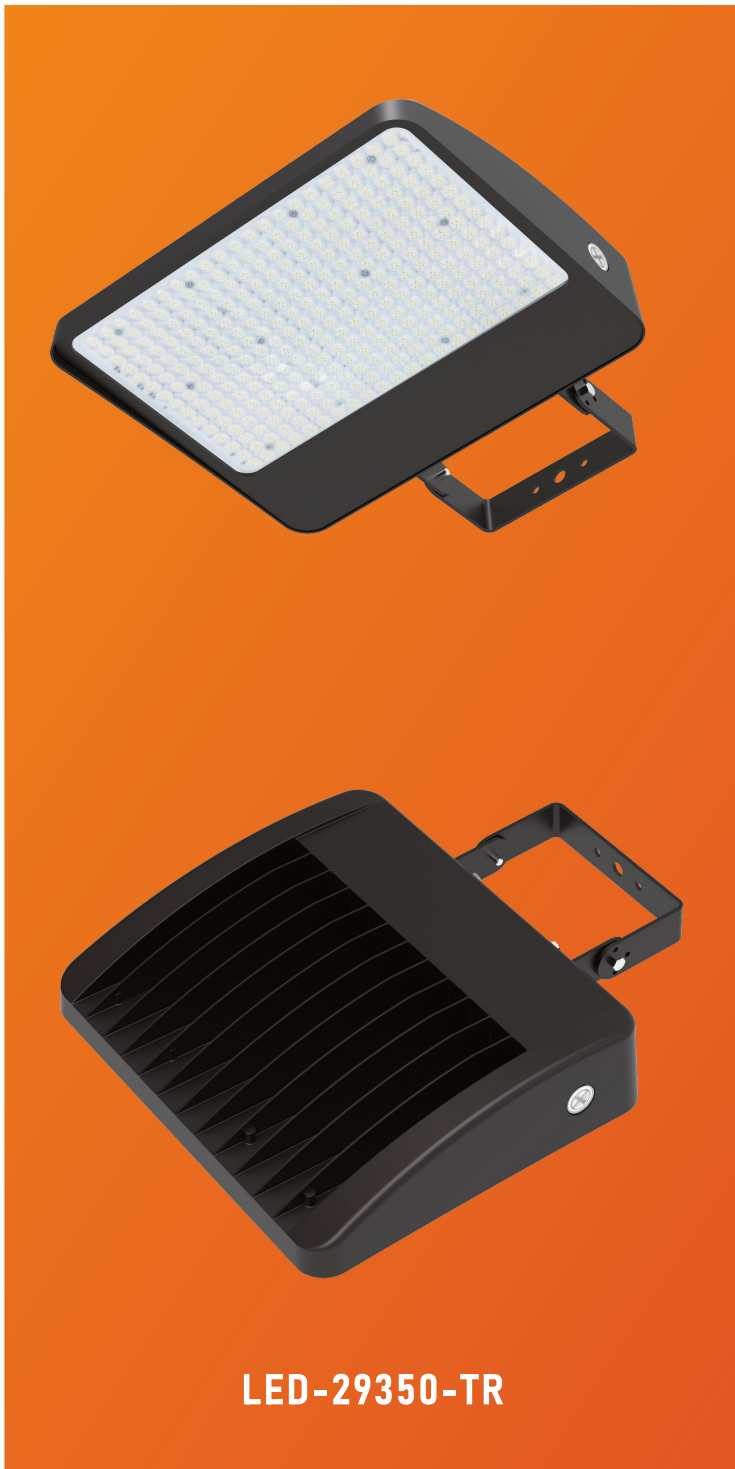

FEATURES

LISTING

UL and cUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

LEDS

New generation LED

FINISH

UV stabilized powder coated finish

OPTIONS

Optional photocell

Finish - Bronze. Color options with adder



PRODUCT DESCRIPTION

This high-power flood light seamlessly blends practical innovation with modern aesthetics. Its upgraded adjustment switch enables easy control of multiple CCT and wattage settings, making it adaptable to a variety of environments. Featuring high-performance optical components and a durable, long-lasting driver, this landscape flood light is designed to provide stable and reliable illumination for years to come.

OPERATING INSTRUCTIONS

3 ANGLES SELECTABLE







7X7 / 6X6 / 5X5

3 WATTAGE SELECTABLE


400 / 325 / 275W

4 CCT SELECTABLE

5000K / 4500K / 4000K / 3000K

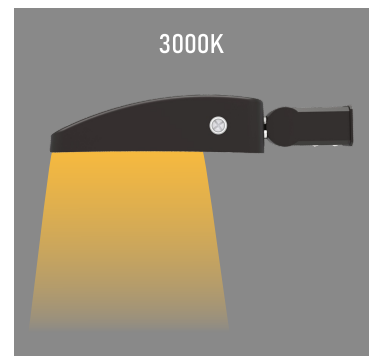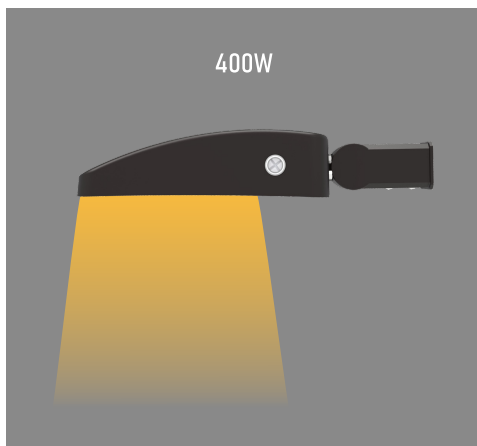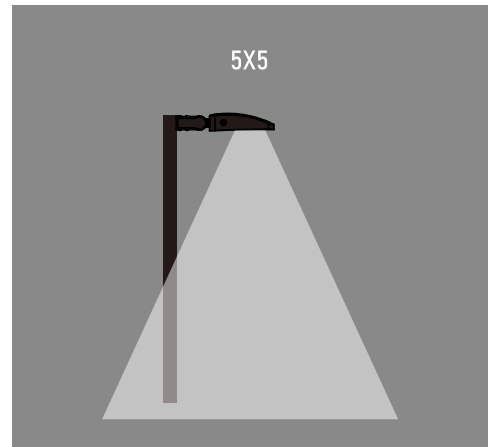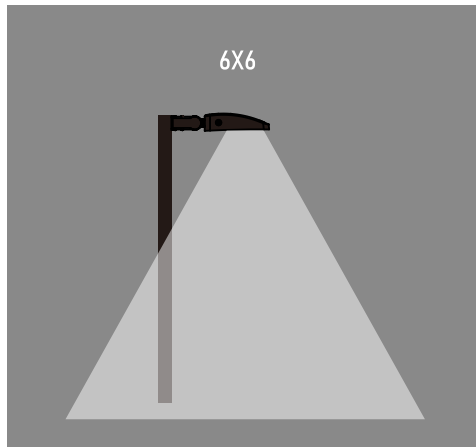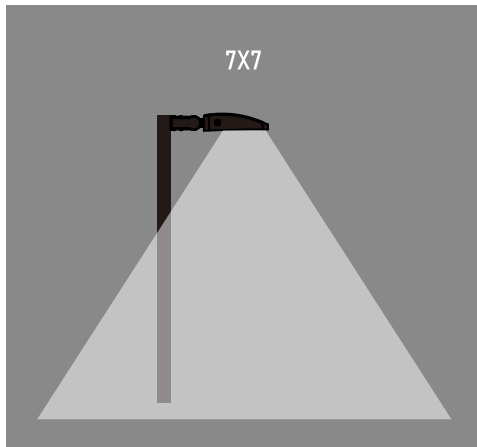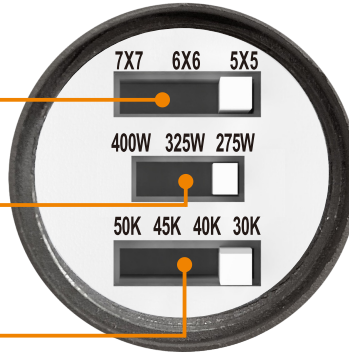

DIMENSION

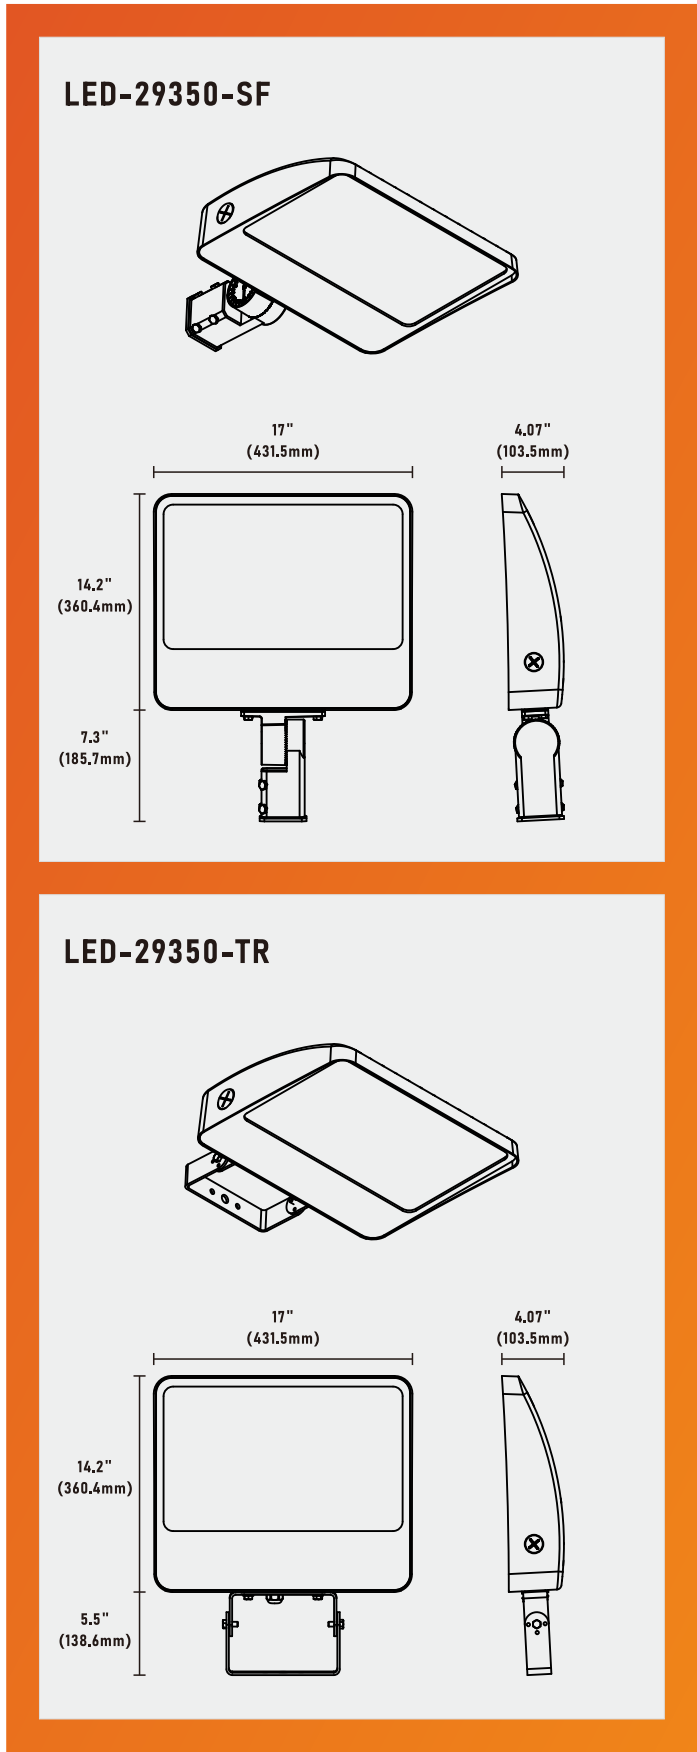

PERFORMANCE DATA

Model No.	LED-29350
Nominal Wattage	275/325/400W
Lumens*	61164 lm*
Efficacy*	152 lm/W*
*Lumen Output and Efficacy are based on the highest wattage at 4000K 5X5	

SPECIFICATION

Model No.	LED-29350
Nominal Wattage	400=400W
Input Voltage	UNV=120-277VAC
CRI	8=80+
Color Temp	TX=3000K / 4000K / 5000K
Option	PC = Photocontrol
Option Mounting	TR=Trunnion / SF=Slip Fitter
Finish	BN=Bronze
Operating Temp	-40°C - +40°C